




Issuance date: 20.09.2022
Validity date: 20.09.2027

Tension string for twin conductor bundle- 2S30 Duplex

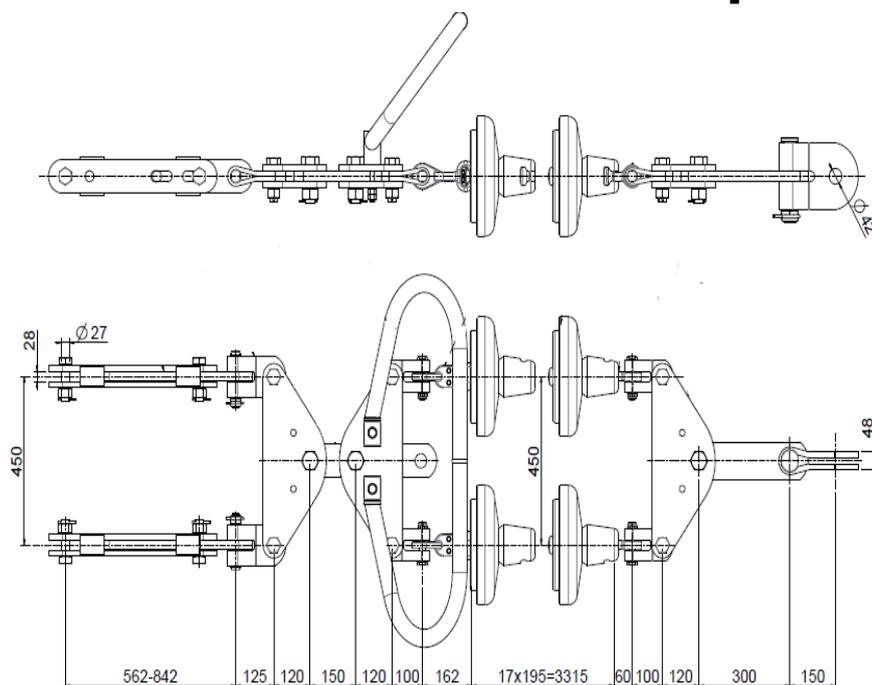

Owner of the EPD:

BELOS PLP S.A.
Address: Gen. J. Kustronia 74,
43-300 Bielsko-Biala, Poland
Tel.: +48 33 814 50 21
Website: <https://www.belos-plp.com.pl/>
Contact: belos@belos-plp.com.pl

EPD Program Operator:

Instytut Techniki Budowlanej (ITB)
Address: Filtrowa 1,
00-611 Warsaw, Poland
Website: www.itb.pl
Contact: Michał Piasecki
m.piasecki@itb.pl
energia@itb.pl

ITB is the verified member of The European Platform for EPD program operators and LCA practitioner www.eco-platform.org

Basic information

This declaration is the Type III Environmental Product Declaration (EPD) based on EN 15804+A2 and verified according to ISO 14025 by an external auditor. It contains the information on the impacts of the declared construction materials on the environment and their aspects verified by the independent body according to ISO 14025. Basically, comparison or evaluation of EPD data is possible only if all the compared data were created according to EN 15804+A2.

Life cycle analysis (LCA): A1-A3, C1-C4 and D modules in accordance with EN 15804
(Cradle-to-Gate with options)

The year of preparing the EPD: 2022

Product standard: EN 61109

Service Life: 40 years

PCR: ITB-PCR A

Declared unit: 1 item

Reasons for performing LCA: B2B

Representativeness: Polish, European, 2021

Type III Environmental Product Declaration No. 363/2022

MANUFACTURER

BELOS-PLP S.A. is the largest Polish producer of network equipment for HV, MV, LV and LV lines of power stations, operating in the power industry since 1947. Belos-PLP maintains close cooperation with market-leading design offices and research institutes, thanks to which our products meet the required standards. In 2007, after the entry of a strategic investor, the company became part of the Preformed Line Products (PLP) group - a global manufacturer and supplier of products, technologies and solutions for energy and telecommunications. Preformed Line Products (PLP) based in Cleveland, Ohio, listed on the NASDAQ: PLPC was founded in 1947. It is currently an international group that supplies its products to customers all over the world. The environmental declaration covers the product - Tension string for twin conductor bundle 2S30 used in high voltage networks. The product is manufactured at the Bielsko-Biala manufacturing plant in Poland.



PRODUCTS DESCRIPTION AND APPLICATION

The products covered by this EPD is insulator string for high voltage transmission lines made of HDG steel elements (hot dip galvanized Z/Zn acc PN-EN ISO 1461). Suspension insulators string made by BELOS (catalog number 2S30-Duplex) is used as tension insulators string, a part of transmission lines in power networks being the installation which helps transmit power over long distances. Mass of the product is 163 kg (metal parts without insulator), max length is 5665 mm and max spacing is 450 mm. More detailed technical information can be found at manufacturer [web](#) site.

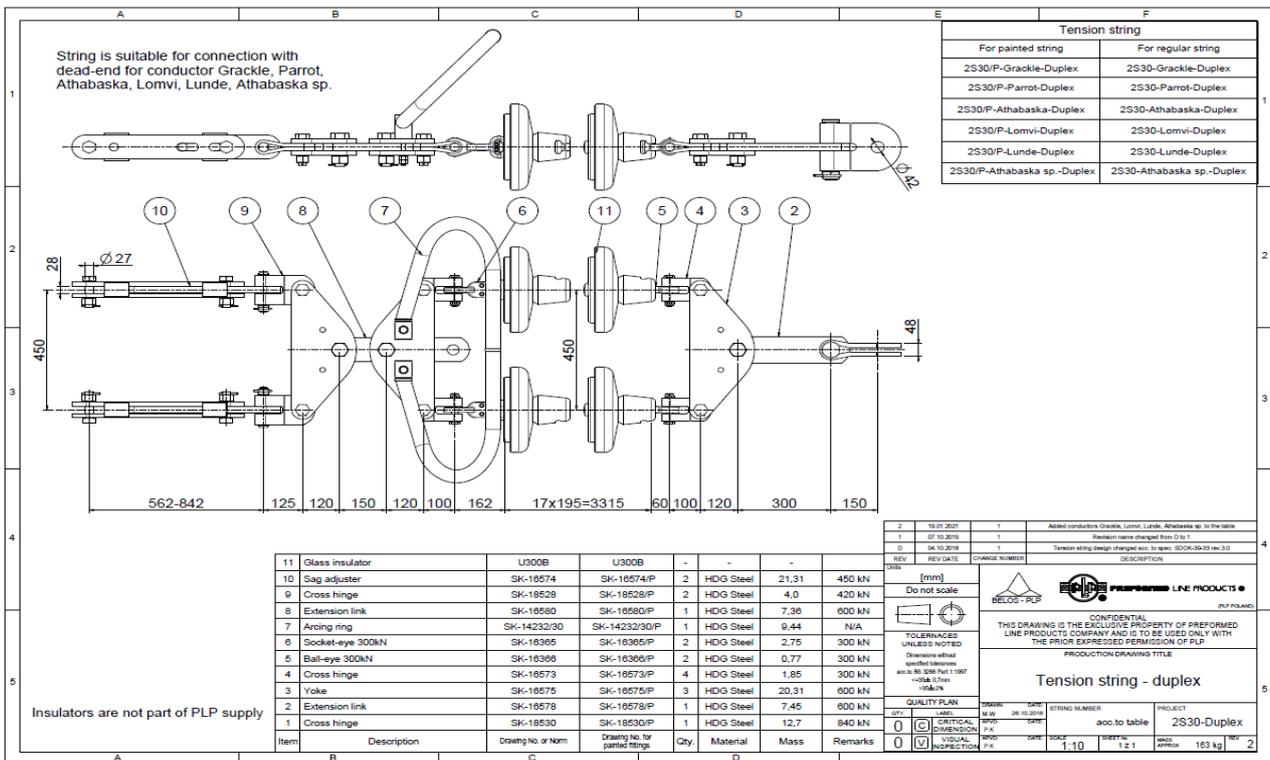


Fig 1. Basic technical information on 2S30-Duplex product

LIFE CYCLE ASSESSMENT (LCA) – general rules applied

Unit

The declared unit is one multi-element product made of HDG steel (163 kg)

System boundary

The life cycle analysis of the declared products covers “Product Stage” A1-A3, C1-C4+D modules in accordance with EN 15804 and ITB PCR A (cradle to gate with options). Energy and water consumption, emissions as well as information on generated wastes were inventoried and were included in the calculation. It can be assumed that the total sum of omitted processes does not exceed 5% of all impact categories. In accordance with EN 15804+A2, machines and facilities (capital goods) required for the production as well as transportation of employees were not included in LCA.

Allocation

The allocation rules used for this EPD are based on general ITB’s document PCR A. Production of the covered steel products is a line process (as presented in figure 2) conducted in the manufacturing plant located in Bielsko-Biała (Poland). Input and output data from the production is inventoried and allocated to the production on the mass basis.

System limits

Minimum 99.0% input materials and 100% energy consumption (electricity, gas, heat, LPG) were inventoried in a processing plant and were included in the calculation. In the assessment, all significant parameters from gathered production data are considered, i.e. all material used per formulation, utilized thermal energy, and electric power consumption, direct production waste and available emission measurements. Tires consumption for transport was not considered. Substances with a percentage share of less than 0.1% of total mass were excluded from the calculations. The packaging products (wooden pallets and boxes) are included.

Modules A1 and A2: *Raw materials supply and transport*

The modules A1 and A2 represent the extraction and processing of raw materials (mainly steel provided by European producers) and transport to the production site. Steel used come from the suppliers producing steel with 50% EAF technology and 50% BOF. For A2 module (transport) European averages for fuel data are applied. All transport of input resources is inventoried in details.

Module A3: *Production*

The product specific manufacturing process line is presented in Figure 1, an input steel/semi-product is processed (mechanical and thermal treatment) to a dedicated shape and elements are galvanized and assembled. Electricity and gas are consumed in the process.

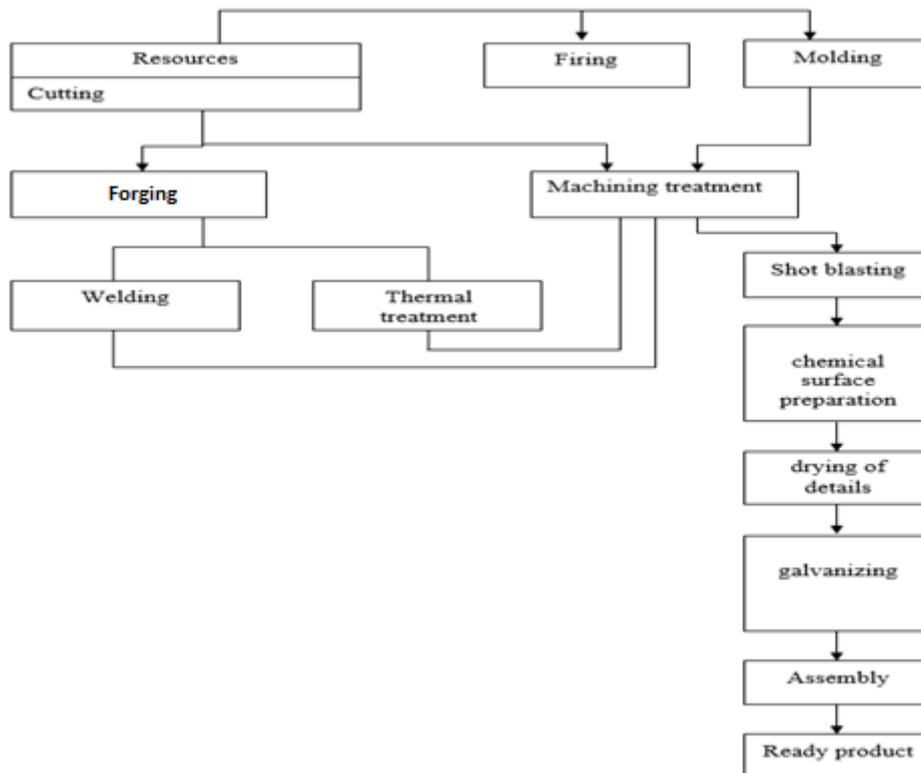


Fig. 2. A basic scheme of the product manufacturing process

Modules C2-C4 and D: End-of-life (EOL)

The amount of energy for disassembly in C1 module by electric mechanical tool was generalized and based on actual practice. In the adapted end-of-life scenario, the de-constructed steel products are transported to a steel mill distant by 100 km on > 16t lorry EURO 5 where are used as steel scrap to produce a new steel. The recycling potential of C3 module is 98% and it is assumed that only 2% of the products will end up in a landfill – C4 module (table 1). Module D presents credits resulting from the recycling of the steel scrap, calculated in accordance with the is the net amount of scrap approach developed by World Steel Association.

Table 1. End-of-life scenario for the steel products

Material	Material recovery	Recycling	Landfilling
Steel scrap	100%	98%	2%

Electricity at end-of-life (module C) has been modelled using an average Polish electricity mix as the location where the product reaches end-of-life is unknown.

Data collection period

The data for manufacture of the declared products refer to period between 01.01.2021 – 31.12.2021 (1 year). The life cycle assessments were prepared for Poland and Europe as reference area.

Data quality

The data selected for LCA originate from ITB-LCI questionnaires completed by BELOS using the inventory data, ITB and Ecoinvent v.3.8 database. No specific data collected is older than five years and no generic datasets used are older than ten years. The representativeness, completeness, reliability, and consistency are judged as good. The background data for the processes come from

Type III Environmental Product Declaration No. 363/2022

the following databases: Ecoinvent v.3.8 (steel unalloyed and alloyed, cast steel, welding wire, bolts, nuts (mechanical processing), galvanization process, zinc alloy, grease, wooden packaging, low alloy construction steel, water, waste water treatment) and KOBIZE (Polish electricity mix and combustion factors for fuels). KOBIZE data is supplemented with Ecoinvent data on the national electricity mix impact where no specific indicator data is provided. Specific (LCI) data quality analysis was a part of the input data verification. The time related quality of the data used is valid (5 years).

Assumptions and estimates

Possible differences resulting from the production of very specific compositions of steel alloys were taken into account where possible. If not used data for high and low alloy steels produced in BOF and EAF furnaces in Europe (European average).

Calculation rules

LCA was performed using ITB-LCA tool developed in accordance with EN15804+A2. Emission of greenhouse gases was calculated using the IPCC 2013 GWP method with a 100-year horizon. Emission of acidifying substances, Emission of substances to water contributing to oxygen depletion, Emission of gases that contribute to the creation of ground-level ozone, Abiotic depletion, and ozone depletion emissions where all calculated with the CML-IA baseline method

Additional information

Polish electricity mix used is 0.698 kg CO₂/kWh (KOBiZE 2021).

LIFE CYCLE ASSESSMENT (LCA) – Results

Declared unit

The declaration refers to declared unit (DU) – 1 piece of suspension string for twin conductor bundle-2S30 Duplex produced by BELOS. The environmental impacts of the life cycle are shown in Tables 3-6.

Table 2. System boundaries for the environmental characteristic of the 2S30 Duplex

Environmental assessment information (MD – Module Declared, MND – Module Not Declared, INA – Indicator Not Assessed)																	
Product stage			Construction process		Use stage								End of life				Benefits and loads beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport to construction site	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
MD	MD	MD	MND	MND	MND	MND	MND	MND	MND	MND	MND	MD	MD	MD	MD	MD	

Type III Environmental Product Declaration No. 363/2022

Table 3. Life cycle assessment (LCA) results of the 2S30 Duplex product manufactured by Belos – environmental impacts (DU: 1 product, 163 kg)

Indicator	Unit	A1	A2	A3	C1	C2	C3	C4	D
Global Warming Potential	eq. kg CO ₂	2.12E+02	2.47E+00	1.67E+02	6.68E-01	8.50E-02	3.27E+00	1.16E-02	-1.35E+02
Greenhouse gas potential - fossil	eq. kg CO ₂	2.09E+02	2.46E+00	1.65E+02	6.68E-01	8.47E-02	3.26E+00	1.16E+01	-1.35E+02
Greenhouse gas potential - biogenic	eq. kg CO ₂	2.53E+00	8.41E-03	4.07E+00	5.73E-04	2.89E-04	2.80E-03	2.95E-02	-3.03E-01
Global warming potential - land use and land use change	eq. kg CO ₂	1.73E-01	9.66E-04	4.96E-02	6.61E-05	3.32E-05	3.23E-04	1.09E-02	-1.73E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	1.23E-05	5.69E-07	6.76E-06	1.42E-07	1.96E-08	6.92E-07	4.69E-06	-5.03E-06
Soil and water acidification potential	eq. mol H+	3.47E+00	9.98E-03	1.56E+00	3.33E-03	3.44E-04	1.63E-02	1.09E-01	-5.34E-01
Eutrophication potential - freshwater	eq. kg P	1.18E-01	1.65E-04	2.61E-01	2.05E-05	5.69E-06	1.00E-04	1.08E-03	-5.90E-02
Eutrophication potential - seawater	eq. kg N	2.82E-01	3.01E-03	2.32E-01	1.30E-03	1.04E-04	6.34E-03	3.79E-02	-1.17E-01
Eutrophication potential - terrestrial	eq. mol N	1.36E+01	3.29E-02	1.94E+00	1.42E-02	1.13E-03	6.95E-02	4.15E-01	-1.28E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	8.97E-01	1.01E-02	5.54E-01	4.01E-03	3.47E-04	1.96E-02	1.21E-01	-6.67E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	8.95E-03	8.72E-06	6.90E-04	3.46E-07	3.00E-07	1.69E-06	2.66E-05	-2.33E-03
Abiotic depletion potential - fossil fuels	MJ	2.44E+03	3.65E+01	2.77E+03	8.91E+00	1.26E+00	4.36E+01	3.18E+02	-1.16E+03
Water deprivation potential	eq. m ³	8.96E+01	1.69E-01	4.95E+01	2.39E-02	5.81E-03	1.17E-01	1.01E+00	-2.46E+01

Table 4. Life cycle assessment (LCA) results of the 2S30 Duplex product manufactured by Belos – additional impacts indicators (DU: 1 product)

Indicator	Unit	A1	A2	A3	C1	C2	C3	C4	D
Particulate matter	disease incidence	INA							
Potential human exposure efficiency relative to U235	eg. kBq U235	INA							
Potential comparative toxic unit for ecosystems	CTUe	INA							
Potential comparative toxic unit for humans (cancer effects)	CTUh	INA							
Potential comparative toxic unit for humans (non-cancer effects)	CTUh	INA							
Potential soil quality index	dimensionless	INA							

Type III Environmental Product Declaration No. 363/2022

Table 5. Life cycle assessment (LCA) results of the 2S30 Duplex product manufactured by Belos - the resource use (DU: 1 product, 163kg)

Indicator	Unit	A1	A2	A3	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	INA							
Consumption of renewable primary energy resources used as raw materials	MJ	INA							
Total consumption of renewable primary energy resources	MJ	1.79E+02	5.24E-01	1.73E+02	5.12E-02	1.22E-02	1.69E-01	2.76E+00	-9.48E+01
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	INA							
Consumption of non-renewable primary energy resources used as raw materials	MJ	INA							
Total consumption of non-renewable primary energy resources	MJ	2.51E+03	3.65E+01	2.82E+03	9.65E+00	1.26E+00	4.72E+01	4.71E+02	-1.12E+03
Consumption of secondary materials	kg	1.90E+01	1.22E-02	2.17E-01	0.00E+00	4.21E-04	0.00E+00	9.89E-02	1.66E+02
Consumption of renewable secondary fuels	MJ	4.67E-03	1.35E-04	1.19E-03	0.00E+00	4.64E-06	0.00E+00	2.58E-03	-1.20E-03
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	1.88E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-9.37E-01
Net consumption of freshwater resources	m ³	1.30E+00	4.59E-03	4.21E-01	1.60E-04	1.58E-04	7.82E-04	5.15E-01	-1.32E-02

Table 6. Life cycle assessment (LCA) results of the 2S30 Duplex product manufactured by Belos – waste categories (DU: 1 product, 163 kg)

Indicator	Unit	A1	A2	A3	C1	C2	C3	C4	D
Hazardous waste	kg	6.43E-02	4.10E-02	5.87E+00	2.49E-05	1.41E-03	1.22E-04	5.00E-01	-1.48E-03
Non-hazardous waste	kg	6.11E+01	7.28E-01	2.00E+00	1.21E-02	2.50E-02	5.93E-02	7.05E+00	-2.90E-01
Radioactive waste	kg	8.05E-03	2.73E-06	2.39E-03	6.27E-05	9.38E-08	3.07E-04	3.13E-03	-2.94E-05
Components for re-use	kg	0.00E+00							
Materials for recycling	kg	1.08E-02	1.13E-04	3.23E+01	0.00E+00	3.89E-06	1.67E+02	9.42E-04	-1.01E-01
Materials for energy recovery	kg	3.49E-05	9.14E-07	2.70E-01	0.00E+00	3.15E-08	0.00E+00	1.12E-05	-3.76E-08

Type III Environmental Product Declaration No. 363/2022

Verification

The process of verification of this EPD is in accordance with ISO 14025 and ISO 21930. After verification, this EPD is valid for a 5-year-period. EPD does not have to be recalculated after 5 years, if the underlying data have not changed significantly.

The basis for LCA analysis was EN 15804 and ITB PCR A
Independent verification corresponding to ISO 14025 (subclause 8.1.3.) <input checked="" type="checkbox"/> external <input type="checkbox"/> internal
External verification of EPD: Halina Prejzner, PhD. Eng. LCA, LCI audit and input data verification: Michał Piasecki, PhD., D.Sc., Eng.

Note: The declaration owner has the sole ownership, liability, and responsibility for the declaration. Declarations within the same product category but from different programmes may not be comparable. Declarations of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

Normative references

- ITB PCR A General Product Category Rules for Construction Products
- EN 61109 VDE 0441-100:2009-06 Insulators for overhead lines Composite suspension and tension insulators for a.c. systems with a nominal voltage greater than 1 000 V – Definitions, test methods and acceptance criteria
- ISO 14025:2006, Environmental labels and declarations – Type III environmental declarations – Principles and procedures
- ISO 21930:2017 Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services
- ISO 14044:2006 Environmental management – Life cycle assessment – Requirements and guidelines
- ISO 15686-1:2011 Buildings and constructed assets – Service life planning – Part 1: General principles and framework
- ISO 15686-8:2008 Buildings and constructed assets – Service life planning – Part 8: Reference service life and service-life estimation
- EN 15804:2012+A2:2019 Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products
- ISO 14067:2018 Greenhouse gases — Carbon footprint of products — Requirements and guidelines for quantification
- EN 15942:2012 Sustainability of construction works – Environmental product declarations – Communication format business-to-business
- ISO 20915:2018 Life cycle inventory calculation methodology for steel products
- KOBiZE Wskaźniki emisyjności CO₂, SO₂, NO_x, CO i pyłu całkowitego dla energii elektrycznej. Grudzień 2021
- World Steel Association 2017 Life Cycle inventory methodology report for steel products



Instytut Techniki Budowlanej

00-611 Warsaw, Filtrowa 1

Thermal Physics, Acoustics and Environment Department

02-656 Warsaw, Ksawerów 21

CERTIFICATE № 363/2022 of TYPE III ENVIRONMENTAL DECLARATION

Product:

Tension string for twin conductor bundle - 2S30-Duplex

Manufacturer:

BELOS-PLP S.A.

Gen. J. Kustronia 74, 43-301 Bielsko-Biała, Poland

confirms the correctness of the data included in the development of
Type III Environmental Declaration and accordance with the requirements of the standard

EN 15804

Sustainability of construction works.

Environmental product declarations.

Core rules for the product category of construction products.

This certificate, issued for the first time on 20th September 2022 is valid for 5 years
or until amendment of mentioned Environmental Declaration

Head of the Thermal Physic, Acoustics
and Environment Department


Agnieszka Winkler-Skalna, PhD



Deputy Director
for Research and Innovation


Krzysztof Kuczyński, PhD

Warsaw, September 2022