



Issuance date: 30.03.2023
Validity date: 30.03.2028

Concrete ECOPact

based on CEM V/A (S-V) 42,5 N - LH/HSR/NA
from Małogoszcz Cement Plant

Krakow sector

EPD Program Operator:

Institut Techniki Budowlanej (ITB)
Address: Filtrowa 1, 00-611 Warsaw, Poland
Website: www.itb.pl
Contact: energia@itb.pl



Owner of the EPD:

Lafarge Cement S.A.
Address: Warszawska 110; 28-366 Małogoszcz
Contact: +48 41 248 70 00
Website: <https://www.lafarge.pl/>

ITB is the verified member of The European Platform for EPD program operators and LCA practitioner www.eco-platform.org

Basic information

This declaration is the Type III Environmental Product Declaration (EPD) based on EN 15804 and verified according to ISO 14025 by an external auditor. It contains the information on the impacts of the declared construction materials on the environment. Their aspects were verified by the independent body according to ISO 14025. Basically, a comparison or evaluation of EPD data is possible only if all the compared data were created according to EN 15804.

Life cycle analysis (LCA): A1-A3, in accordance with EN 15804+A2

The year of preparing the EPD: 2023

Product standard: PN-EN 206+A2:2021-08

Service Life: no reference service life of concretes is declared as they are intermediate products used in construction

PCR: ITB-PCR A (PCR based on EN 15804) and EN 16908

Declared unit: 1 m³ of concrete mix

Reasons for performing LCA: B2B

Representativeness: Polish, European

Environmental Product Declaration Type III ITB No. 435/2023

BASIC INFORMATION

The Lafarge company has been operating in Poland since 1995 (since 2015 as Lafarge Cement S.A.). It has over 60 production plants, including: cement plants, mines, aggregate transshipments and concrete plants. The largest Lafarge plants in Poland are Małogoszcz and Kujawy Cement Plants.

Declaration covers 6 groups of concretes produced by Lafarge plants located in Poland at Krakow sector (plants: Bociana, Fredry, Cementowa, Czernichów, Chrzanów).

Cement used for these concretes is produced by Lafarge Cement S.A. in the Małogoszcz Cement Plant.

The life-cycle assessment was carried out according to the following standards: PN-EN 15804+A2, PN-EN ISO 14025, PN-EN ISO 14040 and the product categorization rules provided in document ITB PCR-A. Declared reference unit is 1 m³ of concrete.

LCI data for cement was collected by Lafarge from own cement plant between January and December 2021 and gathered data is representative for production technology also used in 2022. LCI data for concrete was collected by Lafarge from own concrete plants between January and August 2022. LCA assessment was carried out using GCCA tool v3.2 dedicated to calculate the LCA and data collected by the cement industry. CEM production (used in concretes) is characterized by high use of alternative fuels and consumed electricity based on renewable energy.

PRODUCTS DESCRIPTION

Concrete is specified and supplied in accordance with EN 206. Delivered to site on a just-in-time basis, mixed concrete may be cast into any conceivable shape with almost no limit on volume. When hardened, concrete can carry substantial compressive loads by itself, but is more frequently reinforced to substantially increase its tensile and flexural strength. Concrete is used for site-mixed structures, precast structures and structural precast products in buildings prefabricated structures and structural prefabricated products in buildings and buildings.

The product assessed is a generic 1 m³ of mixed concrete, where the constituent proportions, in mass percent, for six groups are provided in table 1.

Table 1. Concrete mix recipes for each group

	Group I	Group II	Group III	Group IV	Group V	Group VI
Cement	6-8 %	8-9,5 %	9,5-11 %	11-12,5 %	12,5-14 %	14-15,5 %
Ash	0-6 %	0-6 %	0-4 %	0-3 %	0-3 %	0-3 %
Sand	35-60 %	33-55 %	32-53 %	31-35%	30-34%	31-33%
Coarse Aggregate	23-44 %	27-45 %	26-52%	41-45%	43-48%	42-47%
Admixtures	0-0,2 %	0-0,2 %	0-0,2 %	0-0,2 %	0-0,2 %	0-0,2 %
Water	6-10 %	6-10 %	6-10 %	6-10 %	6-10 %	6-10 %

Table 1 values represent an averaged factory produced mixed concrete produced in Poland by Lafarge. The composition of products complying with the EPD will vary depending on client's specification and application. More detailed information is available in the respective manufacturer's documentation (e.g. product data sheets).

LIFE CYCLE ASSESSMENT (LCA) – general rules applied

Unit

The declared unit is 1 m³ of representative concretes ECOPact for a group I to VI (according to Table 1).

System boundary

The EPD covers the product stage analysis (“cradle to gate”) based on ECOPact concrete production plants data analyzed. The selected system boundaries comprise the production of input raw materials’ extraction up to the finished product at the factory gate (ready concrete). The product stage contains: Module A1: extraction and processing of raw materials (ash, sand, gravel, additives, water, and cement (2 plants) and fuels, Module A2: transportation up to factory gate of raw materials and fuels, Module A3: concrete production (mixing). Inputs and processes of product system are presented in Figure 1.

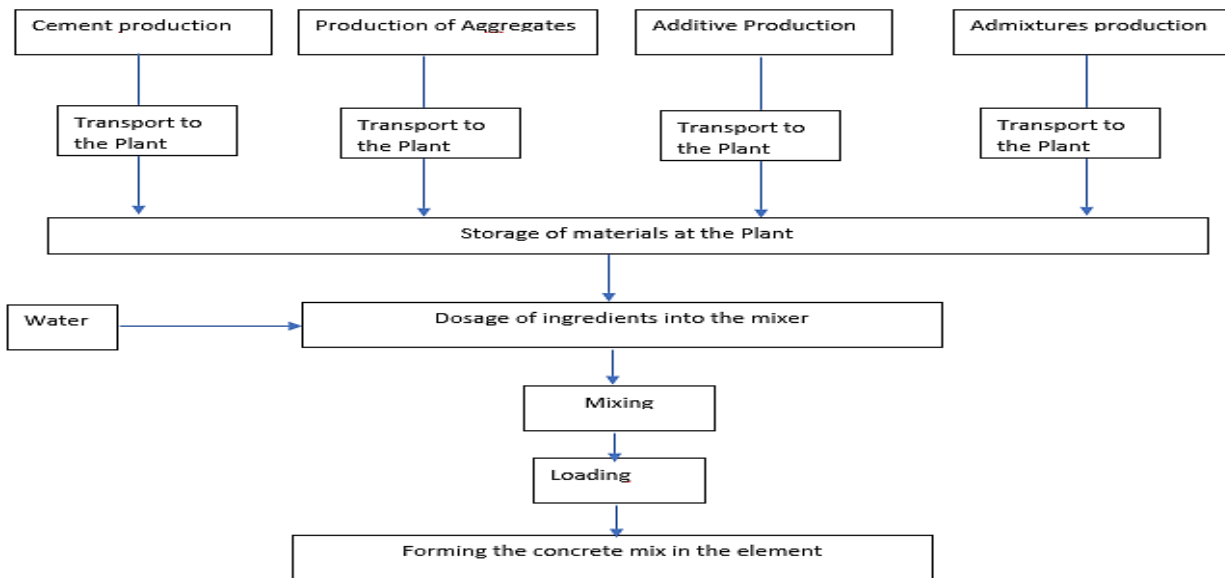


Figure 1. Concrete mix production - inputs and processes of the product system.

Allocation rules

The allocation rules used for this EPD are based on general requirements provided in ITB PCR A and EN 15804+A2. As no co-products are produced, the flow of materials and energy and the associated release of substances and energy into the environment are related exclusively to the concrete mix produced. ECOPlanet cement from the offer of Lafarge Cement S.A. is used. In the case of fly ash, eco-product from electricity production used as a cement constituent, economic allocation was applied. Minimum 99.5% of impacts from the production lines were allocated to product covered by this declaration. Emissions allocated in clinker/cement production (module A1) are assessed including international methods for ETS system declaration. Calculations for GWP indicator are made taking into account gross and net emissions. The indicated gross value includes the CO₂ emissions from waste incineration (excluding biomass fraction of fuels), net-value excluding impacts from alternative waste-based fuels.

System limits

In this assessment, all information gathered from data collection for the production of concrete has been modelled, i.e. all raw materials used, the electrical energy and other fuels used, use of ancillary materials and all direct production waste. Transport data on input was considered. No cut-offs have been made in accordance with EN 15804. The machines and facilities (capital goods) required for and during production are excluded, as is transportation of employees. Calculations for GWP indicator are made taking into account gross and net emissions.

Environmental Product Declaration Type III ITB No. 435/2023

A1 – A2 Modules: Raw materials supply and transport

Concrete according to EN 206 is made by mixing coarse and fine aggregates, cement and water in controlled proportions. Chemical admixtures are used to reduce water content and improve fresh and hardened concrete properties. The averaged compositions of each class mix is provided in Table 1. Cement production used (A1) in concrete are characterized by high use of alternative fuels and consumed renewable electric energy (based on green certificates). Transport of input materials to production plants was inventoried. Most of the other additives, such as ash and aggregates, come from local suppliers.

A3 Module Production

Substrates for concrete production are transported to the plant and then stored in silos. Electricity is used for production (mixing). Substrates are weighed and mixed according to of the process shown in Figure 1. The production uses cements produced by the Lafarge Cement S.A..

Data collection period

The data for manufacture of the declared products refer to period between 01.01.2022 – 31.08.2022. The life cycle assessments were done for Poland as reference area.

Data quality - production

The values determined to calculate A1 (cement) and A3 originate from verified Lafarge inventory data. A1 values (raw materials) were prepared considering specific EPDs (for cements), GCCA v3.2 data.

Assumptions and estimates

The impacts of the representative products were aggregated using weighted average. Data regarding production per 1 m³ of product were averaged for the analyzed production of each product class. Due to the difficulty of separating the cement production processes from concrete in six cases, the data were aggregated as A1-A3.

Calculation rules

LCA was done in accordance with ITB PCR A document. Characterization factors are CML ver. 4.2 based. ITB-LCA algorithms were used for impact calculations. Module A1 was calculated based on data from the database and specific EPDs, A3 and A2 are calculated based on the LCI questionnaire provided by the manufacturer.

Databases

The background data for the processes come from the following databases: GCCA tool v3.2 (sand, water, aggregate, admixtures, RES electricity production for Poland, transport), specific EPD and specific emission reporting data for cement production by Lafarge in each of own plants. Electricity provider guarantees a certificate of origin of renewable electricity used by Lafarge Cement Plants. Energy in accordance with the standard energy mix is used for the production of concrete. Specific (LCI) data quality analysis was a part of audit. The time related quality of the data used is valid (5 years).

Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to EN 15804 and the building context, respectively the product-specific characteristics of performance, are taken into account. In practice, this means that concrete may be compared in a specific application with the selected usage scenario.

Environmental Product Declaration Type III ITB No. 435/2023

LIFE CYCLE ASSESSMENT (LCA) – Results

Declared unit

The declaration refers to the unit DU – 1 m³ of concretes for group I to VI produced by Lafarge in Poland. The LCA results are presented for 1 m³ (Tables 3-8).

Table 2. System boundaries (life stage modules included) in a product environmental assessment

Environmental assessment information (MA – Module assessed, MNA – Module not assessed, INA – Indicator Not Assessed)																
Product stage			Construction process		Use stage							End of life				Benefits and loads beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport to construction site	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
MA	MA	MA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA

Environmental Product Declaration Type III ITB No. 435/2023

Table 3. Environmental product characteristic (product stage) – 1 m³ of concrete group I EcoPact based on: cement ECOPlanet 5A, CEM V/A (S-V) 42,5 N - LH/HSR/NA

Environmental impacts: (DU) 1 m ³		
Indicator	Unit	A1-A3
Global Warming Potential		
Global Warming Potential (net value) ¹	eq. kg CO ₂	7,59E+01
Greenhouse potential – fossil (gross value) ²	eq. kg CO ₂	8,88E+01
Greenhouse potential - biogenic	eq. kg CO ₂	4,94E-02
Global warming potential - land use and land use change	eq. kg CO ₂	2,95E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	4,93E-06
Soil and water acidification potential	eq. mol H ⁺	3,60E-01
Eutrophication potential - freshwater	eq. kg P	8,48E-03
Eutrophication potential - seawater	eq. kg N	5,95E-04
Eutrophication potential - terrestrial	eq. mol N	1,07E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	2,75E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	9,60E-05
Abiotic depletion potential - fossil fuels	MJ	5,19E+02
Water deprivation potential	eq. m ³	8,52E+01
Environmental aspects: (DU) 1 m ³		
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	8,11E+01
Use of renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	8,11E+01
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	5,20E+02
Use of non-renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	5,20E+02
Use of secondary material	kg	1,03E+02
Use of renewable secondary fuels	MJ	1,16E+02
Use of non-renewable secondary fuels	MJ	1,97E+02
Net use of fresh water	m ³	2,06E+00
Other environmental information describing waste categories: (DU) 1 m ³		
Hazardous waste disposed	kg	0,00E+00
Non-hazardous waste disposed	kg	3,30E-02
Radioactive waste disposed	kg	0,00E+00
Components for re-use	kg	5,14E-01
Materials for recycling	kg	4,13E+00
Materials for energy recover	kg	0,00E+00
Exported energy	MJ	0,00E+00

1) net-value excludes alternative waste-based fuels

2) The gross value includes the CO₂ emissions from waste incineration (excluding biomass fraction of fuels)

Environmental Product Declaration Type III ITB No. 435/2023

Table 4. Environmental product characteristic (product stage) – 1 m³ of concrete group II EcoPact based on: cement ECOPlanet 5A, CEM V/A (S-V) 42,5 N - LH/HSR/NA

Environmental impacts: (DU) 1 m ³		
Indicator	Unit	A1-A3
Global Warming Potential		
Global Warming Potential (net value) ¹	eq. kg CO ₂	8,91E+01
Greenhouse potential – fossil (gross value) ²	eq. kg CO ₂	1,06E+02
Greenhouse potential - biogenic	eq. kg CO ₂	5,55E-02
Global warming potential - land use and land use change	eq. kg CO ₂	3,20E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	5,19E-06
Soil and water acidification potential	eq. mol H ⁺	4,11E-01
Eutrophication potential - freshwater	eq. kg P	9,39E-03
Eutrophication potential - seawater	eq. kg N	6,57E-04
Eutrophication potential - terrestrial	eq. mol N	1,21E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	3,03E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	9,91E-05
Abiotic depletion potential - fossil fuels	MJ	5,57E+02
Water deprivation potential	eq. m ³	8,17E+01
Environmental aspects: (DU) 1 m ³		
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	9,88E+01
Use of renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	9,88E+01
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	5,57E+02
Use of non-renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	5,57E+02
Use of secondary material	kg	1,15E+02
Use of renewable secondary fuels	MJ	1,47E+02
Use of non-renewable secondary fuels	MJ	2,51E+02
Net use of fresh water	m ³	1,97E+00
Other environmental information describing waste categories: (DU) 1 m ³		
Hazardous waste disposed	kg	0,00E+00
Non-hazardous waste disposed	kg	3,30E-02
Radioactive waste disposed	kg	0,00E+00
Components for re-use	kg	6,31E-01
Materials for recycling	kg	0,00E+00
Materials for energy recover	kg	0,00E+00
Exported energy	MJ	0,00E+00

1) net-value excludes alternative waste-based fuels

2) The gross value includes the CO₂ emissions from waste incineration (excluding biomass fraction of fuels)

Environmental Product Declaration Type III ITB No. 435/2023

Table 5. Environmental product characteristic (product stage) – 1 m³ of concrete group III EcoPact based on: cement ECOPlanet 5A, CEM V/A (S-V) 42,5 N - LH/HSR/NA

Environmental impacts: (DU) 1 m ³		
Indicator	Unit	A1-A3
Global Warming Potential		
Global Warming Potential (net value) ¹	eq. kg CO ₂	1,00E+02
Greenhouse potential – fossil (gross value) ²	eq. kg CO ₂	1,20E+02
Greenhouse potential - biogenic	eq. kg CO ₂	5,99E-02
Global warming potential - land use and land use change	eq. kg CO ₂	3,29E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	5,39E-06
Soil and water acidification potential	eq. mol H ⁺	4,57E-01
Eutrophication potential - freshwater	eq. kg P	1,00E-02
Eutrophication potential - seawater	eq. kg N	7,01E-04
Eutrophication potential - terrestrial	eq. mol N	1,35E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	3,26E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	9,66E-05
Abiotic depletion potential - fossil fuels	MJ	5,85E+02
Water deprivation potential	eq. m ³	7,07E+01
Environmental aspects: (DU) 1 m ³		
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	1,14E+02
Use of renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	1,14E+02
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	5,85E+02
Use of non-renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	5,85E+02
Use of secondary material	kg	1,61E+02
Use of renewable secondary fuels	MJ	1,75E+02
Use of non-renewable secondary fuels	MJ	2,98E+02
Net use of fresh water	m ³	1,71E+00
Other environmental information describing waste categories: (DU) 1 m ³		
Hazardous waste disposed	kg	0,00E+00
Non-hazardous waste disposed	kg	3,30E-02
Radioactive waste disposed	kg	0,00E+00
Components for re-use	kg	7,34E-01
Materials for recycling	kg	0,00E+00
Materials for energy recover	kg	0,00E+00
Exported energy	MJ	0,00E+00

1) net-value excludes alternative waste-based fuels

2) The gross value includes the CO₂ emissions from waste incineration (excluding biomass fraction of fuels)

Environmental Product Declaration Type III ITB No. 435/2023

Table 6. Environmental product characteristic (product stage) – 1 m³ of concrete group IV EcoPact based on: cement ECOPlanet 5A, CEM V/A (S-V) 42,5 N - LH/HSR/NA

Environmental impacts: (DU) 1 m ³		
Indicator	Unit	A1-A3
Global Warming Potential		
Global Warming Potential (net value) ¹	eq. kg CO ₂	1,11E+02
Greenhouse potential – fossil (gross value) ²	eq. kg CO ₂	1,34E+02
Greenhouse potential - biogenic	eq. kg CO ₂	6,61E-02
Global warming potential - land use and land use change	eq. kg CO ₂	3,56E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	5,37E-06
Soil and water acidification potential	eq. mol H ⁺	4,78E-01
Eutrophication potential - freshwater	eq. kg P	1,04E-02
Eutrophication potential - seawater	eq. kg N	7,32E-04
Eutrophication potential - terrestrial	eq. mol N	1,41E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	3,50E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	1,01E-04
Abiotic depletion potential - fossil fuels	MJ	5,92E+02
Water deprivation potential	eq. m ³	6,98E+01
Environmental aspects: (DU) 1 m ³		
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	1,31E+02
Use of renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	1,31E+02
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	5,92E+02
Use of non-renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	5,92E+02
Use of secondary material	kg	1,75E+02
Use of renewable secondary fuels	MJ	2,05E+02
Use of non-renewable secondary fuels	MJ	3,49E+02
Net use of fresh water	m ³	1,69E+00
Other environmental information describing waste categories: (DU) 1 m ³		
Hazardous waste disposed	kg	0,00E+00
Non-hazardous waste disposed	kg	3,30E-02
Radioactive waste disposed	kg	0,00E+00
Components for re-use	kg	8,46E-01
Materials for recycling	kg	0,00E+00
Materials for energy recover	kg	0,00E+00
Exported energy	MJ	0,00E+00

1) net-value excludes alternative waste-based fuels

2) The gross value includes the CO₂ emissions from waste incineration (excluding biomass fraction of fuels)

Environmental Product Declaration Type III ITB No. 435/2023

Table 7. Environmental product characteristic (product stage) – 1 m³ of concrete group V EcoPact based on: cement ECOPlanet 5A, CEM V/A (S-V) 42,5 N - LH/HSR/NA

Environmental impacts: (DU) 1 m ³		
Indicator	Unit	A1-A3
Global Warming Potential		
Global Warming Potential (net value) ¹	eq. kg CO ₂	1,29E+02
Greenhouse potential – fossil (gross value) ²	eq. kg CO ₂	1,56E+02
Greenhouse potential - biogenic	eq. kg CO ₂	7,43E-02
Global warming potential - land use and land use change	eq. kg CO ₂	3,95E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	5,97E-06
Soil and water acidification potential	eq. mol H ⁺	5,60E-01
Eutrophication potential - freshwater	eq. kg P	1,20E-02
Eutrophication potential - seawater	eq. kg N	8,37E-04
Eutrophication potential - terrestrial	eq. mol N	1,64E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	3,92E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	1,08E-04
Abiotic depletion potential - fossil fuels	MJ	6,67E+02
Water deprivation potential	eq. m ³	7,01E+01
Environmental aspects: (DU) 1 m ³		
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	1,52E+02
Use of renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	1,52E+02
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	6,67E+02
Use of non-renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	6,67E+02
Use of secondary material	kg	1,80E+02
Use of renewable secondary fuels	MJ	2,43E+02
Use of non-renewable secondary fuels	MJ	4,13E+02
Net use of fresh water	m ³	1,70E+00
Other environmental information describing waste categories: (DU) 1 m ³		
Hazardous waste disposed	kg	0,00E+00
Non-hazardous waste disposed	kg	3,30E-02
Radioactive waste disposed	kg	0,00E+00
Components for re-use	kg	9,87E-01
Materials for recycling	kg	0,00E+00
Materials for energy recover	kg	0,00E+00
Exported energy	MJ	0,00E+00

1) net-value excludes alternative waste-based fuels

2) The gross value includes the CO₂ emissions from waste incineration (excluding biomass fraction of fuels)

Environmental Product Declaration Type III ITB No. 435/2023

Table 8. Environmental product characteristic (product stage) – 1 m³ of concrete group VI EcoPact based on: cement ECOPlanet 5A, CEM V/A (S-V) 42,5 N - LH/HSR/NA

Environmental impacts: (DU) 1 m ³		
Indicator	Unit	A1-A3
Global Warming Potential		
Global Warming Potential (net value) ¹	eq. kg CO ₂	1,36E+02
Greenhouse potential – fossil (gross value) ²	eq. kg CO ₂	1,65E+02
Greenhouse potential - biogenic	eq. kg CO ₂	7,73E-02
Global warming potential - land use and land use change	eq. kg CO ₂	4,09E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	6,38E-06
Soil and water acidification potential	eq. mol H ⁺	6,04E-01
Eutrophication potential - freshwater	eq. kg P	1,28E-02
Eutrophication potential - seawater	eq. kg N	8,90E-04
Eutrophication potential - terrestrial	eq. mol N	1,76E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	4,10E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	1,11E-04
Abiotic depletion potential - fossil fuels	MJ	7,11E+02
Water deprivation potential	eq. m ³	6,99E+01
Environmental aspects: (DU) 1 m ³		
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	1,60E+02
Use of renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	1,60E+02
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	7,11E+02
Use of non-renewable primary energy resources used as raw materials	MJ	0,00E+00
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	7,11E+02
Use of secondary material	kg	1,63E+02
Use of renewable secondary fuels	MJ	2,56E+02
Use of non-renewable secondary fuels	MJ	4,36E+02
Net use of fresh water	m ³	1,70E+00
Other environmental information describing waste categories: (DU) 1 m ³		
Hazardous waste disposed	kg	0,00E+00
Non-hazardous waste disposed	kg	3,30E-02
Radioactive waste disposed	kg	0,00E+00
Components for re-use	kg	1,04E+00
Materials for recycling	kg	0,00E+00
Materials for energy recover	kg	0,00E+00
Exported energy	MJ	0,00E+00

1) net-value excludes alternative waste-based fuels

2) The gross value includes the CO₂ emissions from waste incineration (excluding biomass fraction of fuels)

Environmental Product Declaration Type III ITB No. 435/2023

VERIFICATION

The process of verification of this EPD was in accordance with ISO 14025 and ISO 21930. After verification this EPD is valid for a 5-year-period. EPD does not have to be recalculated after 5 years if the underlying data have not changed significantly.

The basis for LCA analysis was EN 15804 and ITB PCR A
Independent verification corresponding to ISO 14025 (subclause 8.1.3.) <input checked="" type="checkbox"/> external <input type="checkbox"/> internal
External verification of EPD: Ph.D. Eng. Halina Prejzner LCA \ LCI audit and input data verification: Ph.D. D.Sc. Eng. Michał Piasecki. m.piasecki@itb.pl

The purpose of this EPD is to provide the basis for assessing buildings and other construction works. A comparison of EPD data is only meaningful if all the data sets compared were developed according to EN 15804 and the product-specific performance characteristics and its impacts on the construction works are taken into account.

Normative references

- ITB PCR A General Product Category Rules for Construction Products.
- <https://gccassociation.org/>
- EN 206: Concrete. Specification – performance -production and conformity (with amendments).
- EN 197-1:2011: Cement - part 1: Composition, specifications and conformity criteria for common cements.
- PN-EN ISO 14025:2010 Environmental labels and declarations. Type III environmental declarations. Principles and procedures.
- PN-EN 15804 Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products.
- PN-EN 16908:2017-02 Cement and building lime. Environmental product declarations. Product category rules complementary to EN 15804.
- PN-EN ISO 14040:2009 Environmental management - Life cycle assessment - Principles and framework.
- ECRA (European Cement Research Academy) – Background report “TR-ECRA 0181/2014 Environmental Product Declarations for representative European cements”.
- KOBIZE Wskaźniki emisyjności CO₂, SO₂, NO_x, CO i pyłu całkowitego dla energii elektrycznej.
- PN-B-19707 Cement specjalny - Skład, wymagania i kryteria zgodności.