

URSA GLASSWOOL rolls with lambda λ_d 0,035 W/mK



Issuance date: 09.02.2017

Validity date: 09.02.2022

EPD program operator:

Building Research Institute (ITB), 00-611 Warsaw, Filtrowa 1, www.itb.pl

Contact person: Dominik Bekierski - d.bekierski@itb.pl

ITB is the verified member of The European Platform for EPD program operators and LCA practitioners www.eco-platform.org

Manufacturer:

URSA Polska Sp. z o.o.

Address: Armii Krajowej 12; 42-520 Dąbrowa Górnicza

Telephone number: +48 322680129

Website: www.ursa.pl

E-mail address: ursa.polska@ursa.com

Technical Contact: Michał Dylewski - michal.dylewski@ursa.com

Basic information

This declaration is the type III Environmental Product Declaration (EPD) based on EN 15804 and verified according to ISO 14025 by an external auditor. It contains the information on the impacts of declared construction materials on environment and their aspects verified by the independent Body according to ISO 14025. Basically, a comparison or evaluation of EPD data is possible only if all the compared data were created according to EN 15804 (see point 5.3 of the standard).

Life cycle: A1-A3 modules in accordance with EN 15804 (Cradle to Gate)

The year of preparing the EPD: 2017

Declared durability: Under normal conditions, glasswool products are expected to last the service life of a building (30 years).

Product standard: PN-EN 13162+A1:2015-04 - Thermal insulation products for buildings - Factory made mineral wool (MW) products - Specification

PCR: EN 16783:2017, PCR A (PCR based on EN 15804)

Declared unit: FU:1 m² K/W for thermal conductivity $\lambda_d=0,035$ W/mK, weight=0,69 kg

Reasons for performing LCA: B2B

Representativeness: Polish product

Manufacturer and Product Information

URSA offers glass mineral wool insulation materials to cover different building applications. URSA invests time and resources and uses state of the art technology to innovate and offer its customers high performance and durable insulation solutions for buildings.

URSA GLASSWOOL is a mineral wool with thermal and acoustic insulation properties. Due to fire-resistant properties, the product can be used as thermal and/or acoustic insulation of pitched roofs, cold roofs, partitions, external walls and ceilings.

Application

URSA GLASSWOOL is a product for application in terms of thermal insulation especially used as an insulation of pitch roof, attic, cold roof, external wall, internal walls, floors, ceilings, internal sound absorbers. Non-combustible, soundproof, vapor permeable, compressed, resistant to molds and fungi, made of elastic fibers - the material effectively wedges between rafters without mechanical application depending on the spacing of the rafters.

Insulation properties of glass wool allow to keep heat in room during winter and provide cold during the heat period. URSA GLASSWOOL protects also against unwanted noise, and as a non-flammable material, class A reaction to fire (euroclass) A1 reduces the risk of fire.

URSA GLASSWOOL slabs and plates with $\lambda_d=0,035$ W/mK are produced in Dąbrowa Górnicza factory. Product's description is shown below in Table 1.

Table 1. Characteristic of URSA GLASSWOOL rolls produced in Dąbrowa Górnicza

ROLLS: URSA ROLL 35, URSA DF 35, URSA GOLD 35, URSA PREMIUM 35, URSA HOME 35, URSA PROFI 35, ESSENTIA ROLL 35, URSA TRS (trade names for URSA GLASSWOOL rolls with thermal conductivity $\lambda_d=0,035$ W/mK)	
Thickness [mm]	20-250
Width [mm]	300-1250
Length [mm]	300-20000
Colour	undefined
Finishes	no



Figure 1. Application scheme for URSA GLASSWOOL

Distinguishing features

Glass wool mostly produced with products coming from recycling (recovery) contains most important insulation features:

- durability and dimensional stability,
- constancy of insulation properties.

Additional features:

- fire resistance (euroclass A1),
- compression capability,
- low weight,
- possibility of transport and storage,
- ease of use (fig. 1),
- no resistance to permeating water vapor.

LIFE CYCLE ASSESSMENT (LCA) – general rules applied

Allocation

The allocation rules used for this EPD are based on general ITB-PCR A and EN 13162. The glasswool production is a line process with multiple co-products in one factory in Dąbrowa Górnicza. Allocation was done on product mass basis.

All impacts from raw materials extraction are allocated in A1 module of EPD. 99,9% of impacts from line production were inventoried and allocated to all glasswool types production. Municipal waste and waste water of whole factory were allocated to module A3. Electricity was inventoried for whole production process. Emissions were measured separately and presented in A3 module.

System limits

The life cycle analysis of the examined products covers “Product Stage”, A1-A3 modules (Cradle to Gate) in accordance with EN 15804+A1 and ITB-PCR A. Details on systems limits are provided in product specific report. All materials and energy consumption inventoried in factory were included in calculation. Office impacts were also taken into consideration. In the assessment, all significant parameters from gathered production data are considered, i.e. all material used per formulation, utilised thermal energy, internal fuel and electric power consumption, direct production waste, and all available emission measurements. This study also takes into account some material flows of less than 1% and energy flows with a proportion of less than 1 %. It can be assumed that the total sum of omitted processes does not exceed 5% of all impact categories. In accordance with EN 15804, machines and facilities (capital goods) required for and during production are excluded, as is transportation of employees.

A1 and A2 Modules: Raw materials supply and transport

Raw materials for glass wool production come from local suppliers and from more distant locations. Data on transport of the different products to the manufacturing plants is collected and modelled for factory by assessor. Means of transport include truck, train and ship, and Polish and European fuel averages are applied.

A3: Production

The figure 2 shows the working process during the production of URSA GLASSWOOL. The raw materials are measured and sent to a melting furnace. In the process of glass wool production the raw materials are sand, limestone and soda ash, as well as recycled cullets and off-cuts from the production process. Recycled content in URSA factory in Dąbrowa Górnicza accounts from 66% in the mass basis. The reuse of off-cuts and recycled materials has helped to steadily reduce the energy input required to produce glass wool.

Furnace

The raw materials are melted in a furnace at temperatures, typically between 1,300°C and 1,500°C. The smoke created during this process is filtered and flue gases are cleaned to minimize any environmental impact.

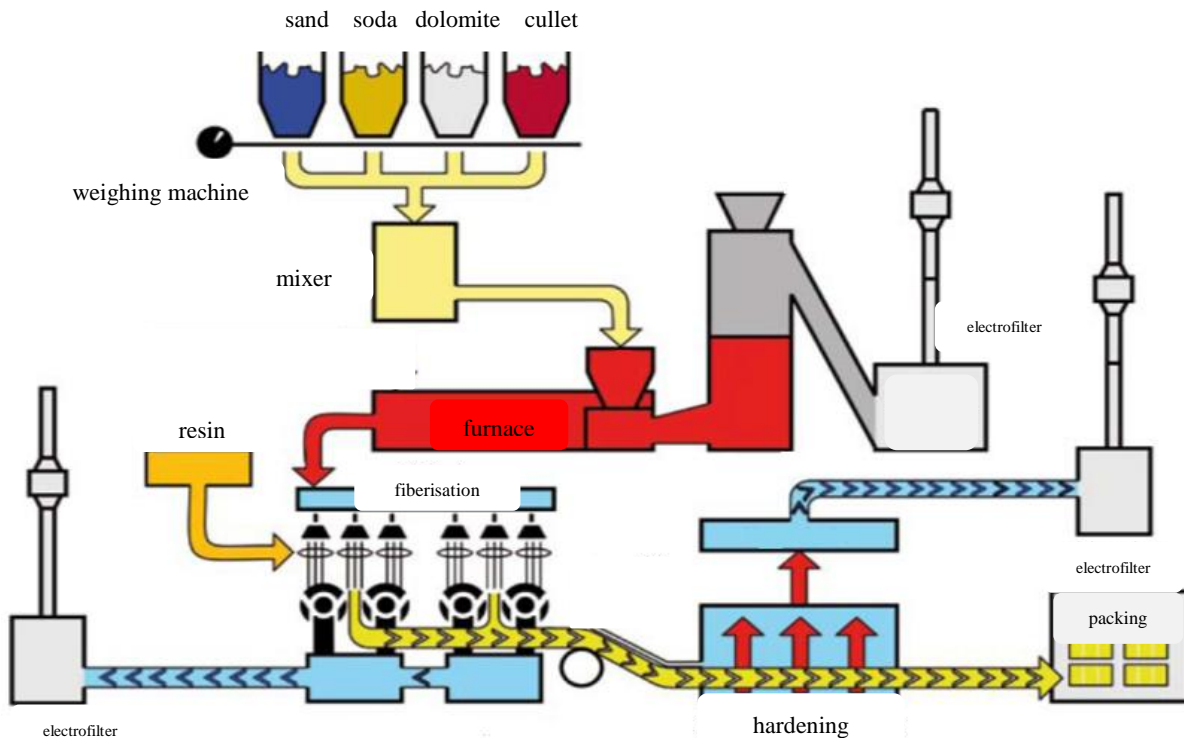


Figure 2. Production scheme for URSA GLASSWOOL

Spinning

The droplets of melted glass exiting the furnace are spun into fibers. Droplets fall through tiny holes in rapidly rotating spinners. This process shapes it into fibers.

Binding

Small quantities of binding agents such as a resin are added to the fibers. The structure and density of the product are adapted according to its final usage.

Curing

The glasswool is then hardened in a curing oven at around 200°C.

Cutting

The glasswool is cut to the required size and shape into plates folded into rolls or it can be customized for use with other products. Off-cuts and other wool scraps are recycled back into the production process, which further reduces inputs and energy requirements.

Packaging

Glasswool is compressed during packaging to reduce its volume. This makes it easier to handle and results in lower carbon emissions due to transportation.

Gases and waste

Gases emitted during the production process are cleaned using electrofilters in order to minimize the environmental impact. Water use in the production process is generally confined to closed circuit systems. This has a twofold advantage: reduces fresh water consumption and eliminates by-products.

Data collection period

The data for manufacture of the examined products refer to period between dates 1.10.2015-30.09.2016. The life cycle assessments were prepared for locations in Poland as reference area.

Data quality

The values determined to calculate the LCA originate from verified URSA Polska inventory data.

Assumptions and estimates

The impacts of the representative URSA GLASSWOOL products for each glasswool product were aggregated using weighted average. The weighted average method was used according to the percentage of each product in glass wool based on the relation to whole production quantity. Impacts were inventoried and calculated for all products in glasswool product group.

Calculation rules

LCA was done in accordance with PCR A document.

Databases

The data for the processes come from the following databases: Ecoinvent, Ullmann's, ITB-Data. Specific data quality analysis was a part of external ISO 14001 audit. Characterization factors are CML ver. 4.2 based on EN 15804:2013+A1 version (PN EN 15804+A1:2014-04)

LIFE CYCLE ASSESSMENT (LCA) - Results

Declared unit

The declaration refers to functional unit (FU) - 1 m² glasswool insulation material with a thickness that gives a declared thermal resistance of R_d= 1 m² K/W.

Table 2. System boundaries for environmental characteristic for URSA GLASSWOOL

Environmental assessment information (MNA – Module not assessed, MD – Module Declared, INA – Indicator Not Assessed)																
Product stage			Construction process		Use stage							End of life				Benefits and loads beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport to construction site	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
MD	MD	MD	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA

URSA GLASSWOOL rolls ($\lambda_d=0,035$ W/mK)

Environmental impacts: (FU)					
Indicator	Unit	A1	A2	A3	A1-A3
Global warming potential	[kg CO ₂ eq.] (100 years)	0,28	0,03	0,66	0,97
Depletion potential of the stratospheric ozone layer	[kg CFC 11 eq.]	2,39E-08	0,00E+00	0,00E+00	2,39E-08
Acidification potential of soil and water	[kg SO ₂ eq.]	8,91E-04	2,58E-04	8,35E-03	9,50E-03
Formation potential of tropospheric ozone	[kg Ethene eq.]	9,67E-05	1,48E-05	1,49E-04	2,61E-04
Eutrophication potential	[kg (PO ₄) ³⁻ eq.]	4,57E-04	4,50E-05	1,49E-03	1,99E-03
Abiotic depletion potential (ADP-elements) for non-fossil resources	[kg Sb eq.]	1,09E-04	0,00E+00	2,45E-06	1,11E-04
Abiotic depletion potential (ADP-fossil fuels) for fossil resources	[MJ]	6,08	0,80	20,96	27,84
Environmental aspects on resource use: (FU)					
Indicator	Unit				
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	[MJ]	1,19E-01	5,92E-03	8,12E-01	9,37E-01
Use of renewable primary energy resources used as raw materials	[MJ]	3,69E-02	8,76E-04	1,38E+00	1,41E+00
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	[MJ]	1,56E-01	6,80E-03	2,19E+00	2,35E+00
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	[MJ]	INA	INA	INA	INA
Use of non-renewable primary energy resources used as raw materials	[MJ]	INA	INA	INA	INA
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	[MJ]	INA	INA	INA	INA
Use of secondary material	[kg]	6,28E-02	0,00	6,28E-02	1,26E-01
Use of renewable secondary fuels	[MJ]	INA	INA	INA	INA
Use of non-renewable secondary fuels	[MJ]	INA	INA	INA	INA
Net use of fresh water	[dm ³]	0,71	0,076	3,87	4,66
Other environmental information describing waste categories: (FU)					
Indicator	Unit	A1	A2	A3	A1-A3
Hazardous waste disposed	[kg]	9,87E-06	INA	1,40E-04	1,50E-04
Non-hazardous waste disposed	[kg]	1,21E-03	INA	4,65E-03	5,87E-03
Radioactive waste disposed	[kg]	INA	INA	INA	INA
Components for re-use	[kg]	0,00E+00	INA	0,00E+00	0,00E+00
Materials for recycling	[kg]	0,00E+00	INA	1,27E-02	1,27E-02
Materials for energy recovery	[kg]	INA	INA	INA	INA
Exported energy	MJ per energy carrier	INA	INA	INA	INA

Verification

The process of verification of this EPD is in accordance with EN ISO 14025 and ISO 21930. After verification, this EPD is valid for a 5-year-period. EPD does not have to be recalculated after 5 years, if the underlying data have not changed significantly.

The basis for LCA analysis was EN 15804 and ITB PCR A
Independent verification corresponding to ISO 14025 & 8.3.1. <input checked="" type="checkbox"/> external <input type="checkbox"/> internal
External verification of EPD: PhD. Eng. Halina Prejzner LCA, LCI audit and input data verification: M.Sc. Eng. Dominik Bekierski, d.bekierski@itb.pl Verification of LCA: PhD Eng. Michał Piasecki, m.piasecki@itb.pl

Normative references

- ITB PCR A- General Product Category Rules for Construction Products
- EN 16783:2017 Thermal insulation products - Product category rules (PCR) for factory made and in-situ formed products for preparing environmental product declarations.
- ISO 14025:2006, Environmental management – Type III environmental declarations – Principles and procedure
- ISO 21930:2007, Sustainability in building and construction – Environmental declaration of building products
- ISO 14044:2006, Environmental management – Life cycle assessment – Requirements and guidelines
- ISO 15686-1:2000, Buildings and constructed assets — Service life planning — Part 1: General principles
- ISO 15686-8:2008, Buildings and constructed assets – Service life planning – Part 8: Reference service life
- EN 15804:2012+A1:2013, Sustainability in construction works – Environmental product declarations – Core rules for the product category of construction products.
- EN15942:2011, Sustainability of construction- Environmental product declarations. Communication format business-to-business



Building Research Institute

00-611 Warszawa, ul. Filtrów 1

K I E R O W N I K
Zakładu Fizyki Ciepłej, Akustyki i Środowiska

dr inż. Michał Piasecki



Instytut Techniki Budowlanej

00-611 Warsaw, Filtrowa 1

Thermal Physics, Acoustics and Environment Department

02-656 Warsaw, Ksawerów 21

CERTIFICATE No 054/2017 of TYPE III ENVIRONMENTAL DECLARATION

Products:

URSA GLASSWOOL rolls with lambda λ_d 0,035 W/mK

URSA DF 35

URSA ROLL 35

URSA GOLD 35

URSA PREMIUM 35

URSA HOME 35

URSA PROFI 35

ESSENTIA ROLL 35

URSA TRS

Manufacturer:

URSA Polska Sp. z o.o.

42-520 Dąbrowa Górnicza, Armii Krajowej 12

confirms the correctness of the data included in the development of
Type III Environmental Declaration and accordance with the requirements of the standard

PN-EN 15804+A1:2014-04

Sustainability of construction works.

Environmental product declarations.

Core rules for the product category of construction products.

This certificate, issued for the first time on 9th February 2017 is valid for 5 years
or until amendment of mentioned Environmental Declaration

Head of the Thermal Physic, Acoustics
and Environment Department



Michał Piasecki, PhD



Deputy Director
for Research and Innovation



Krzysztof Kuczyński, PhD

Warsaw, February 2017