





Issuance date: 20.10.2023 Validity date: 20.10.2028

# Hot-dip galvanized steel structural components



## Owner of the EPD:

Necks IMP Sp. z o.o. Address: Małgorzatowo 4E 87-162 Lubicz Dolny, Poland Tel.: +48 25 643 04 00

Website: <a href="https://www.www.necksimp.pl/">https://www.www.necksimp.pl/</a> Contact: <a href="mailto:katarzyna.durecka@necksimp.pl">katarzyna.durecka@necksimp.pl</a>

## **EPD Program Operator:**

Instytut Techniki Budowlanej (ITB)
Address: Filtrowa 1,
00-611 Warsaw, Poland
Website: www.itb.pl
Contact: Michał Piasecki
m.piasecki@itb.pl
energia@itb.pl



 $\textbf{ITB is the verified member of The European Platform for EPD program operators and LCA practitioner \underline{www.eco-platform.org}$ 

#### **Basic information**

This declaration is the Type III Environmental Product Declaration (EPD) based on EN 15804+A2 and verified according to ISO 14025 by an external auditor. It contains the information on the impacts of the declared construction materials on the environment and their aspects verified by the independent body according to ISO 14025. Basically, comparison or evaluation of EPD data is possible only if all the compared data were created according to EN 15804+A2.

Life cycle analysis (LCA): A1-A3, A4-A5, C1-C4 and D modules in accordance with EN 15804+A2

(Cradle-to-Gate with options)

The year of preparing the EPD: 2023

Product standard: PN-EN 1090-1+A1:2012, PN-EN 1090-2, EN ISO 3834-2

Service Life: 100 years

PCR: ITB-PCR A

Declared unit: 1 kg

Reasons for performing LCA: B2B Representativeness: Poland, 2022

#### **MANUFACTURER**

Production of materials for electrical transmission lines started in 1919 in Nossebro in southern Sweden in the company named Necks Verkstäder AB. The outlet was then the market for materials for the distribution and transmission of electricity in Sweden. The components for the first 400 kV line in the world, made in 1952, came from this factory. Later, the export of materials to Asia, the Middle East and Africa also began. In 1993, the factory was moved to Toruń, Poland.

Currently, Necks Industrial Metal Products Sp. z o.o. is a production company in the Necks Electric Holding AB group, selling in the Scandinavian countries through commercial companies



Figure 1 The view of Necks IMP Sp. z o.o. office and manufacturing plant

belonging to the group. It is part of the Addtech AB group, providing products related to storage, transmission and distribution of electricity, as well as products related to safety, installations and electrical connections. Manufacturer has an extensive machine park allowing for the processing of steel sections and closed profiles, gas cutting of sheets of various thickness, bending of rods and pipes, as well as hot forming. Necks weld steel elements according to ISO 3834-2 standard.

#### PRODUCTS DESCRIPTION

Necks IMP specialises in the production of materials for electrical transmission lines from 0.4 to 500 kV, including HVDC systems (high voltage direct current systems). These materials include: poles, masts, cross supports, foundation elements, structural elements and components for insulation chains. The process in the plant include, among others:

- Cutting and marking of angle brackets, U-sections, I-sections and closed profiles on CNC machines, together with punching or drilling holes
- Gas cutting of steel sheets on CNC machines
- · Cutting and bending steel rods and pipes
- Forging and heat treatment of steel elements
- Flattening
- Welding according to ISO 3834-2
- Threading of steel rods
- Blasting
- Trial assemblies of steel structures, power poles
- Installation of special ropes (e.g. guy ropes) according to customer's instructions
- Assembly and packaging according to customer's instructions
- Shipment of goods according to the customer's instructions.

Assembly and completion of specialist accessories for overhead power lines, steel structures and test assembly of bolted structures. All additional technical information about the product is available on the manufacturer's website and catalogues.

## LIFE CYCLE ASSESSMENT (LCA) – general rules applied

#### Unit

The declared unit is 1 kg of product- Hot-dip galvanized steel structural component.

#### System boundary

The life cycle analysis of the declared products covers "Product Stage" A1-A3, A4-A5, C1-C4+D modules in accordance with EN 15804 and ITB PCR A (cradle to gate with options). Energy and water consumption, emissions as well as information on generated wastes were inventoried and were included in the calculation. It can be assumed that the total sum of omitted processes does not exceed 5% of all impact categories. In accordance with EN 15804+A2, machines and facilities (capital goods) required for the production as well as transportation of employees were not included in LCA.

#### **Allocation**

The allocation rules used for this EPD are based on general ITB's document PCR A. Production of the steel products is a line process (as presented in Figure 2) conducted in the manufacturing plant located in Małgorzatowo (Poland). Input and output data from the production is inventoried and allocated to the production on the mass basis. The declaration covers a wide range of steel products. Their production resources and processing stages are basicly similar, so it is possible to average the production by product weight (averaged).

#### **System limits**

Minimum 99.0% input materials and 100% energy consumption (electricity, gas, LPG, other) were inventoried in a processing plant and were included in the calculation. In the assessment, all significant parameters from gathered production data are considered, i.e. all material used per formulation, utilized thermal energy, and electric power consumption, direct production waste and available emission measurements. Tires consumption for transport was not considered. Substances with a percentage share of less than 0.1% of total mass were excluded from the calculations. The packaging products (wooden pallets) are included.

#### Modules A1 and A2: Raw materials supply and transport

The modules A1 and A2 represent the extraction and processing of raw materials (mainly steel elements) and transport to the production site. The steel sheets are semi-products commonly used to produce prefabricated elements, steel structures. Steel used come from a suppliers producing steel with EAF technology and BOF. For A2 module (transport) European averages for fuel data are applied. Delivery distances and supplier locations have been determined and taken into account.

#### Module A3: Production

The product specific manufacturing process line is presented in Figure 2, an input steel/semi-product is processed to a dedicated shape. The production process is partially automated and is based on receiving metallurgical materials for production (steel elements), followed by cold processing of the steel (unwinding, cutting, bending). Production is followed by assembly of components. This is followed by inspection of the completed assembly. Products are protected against corrosion by hot-dip galvanizing in external galvanizing plant. After the galvanizing process, the product goes back and undergoes further inspections. Finally, the finished product is packaged, labeled and shipped to the customer.

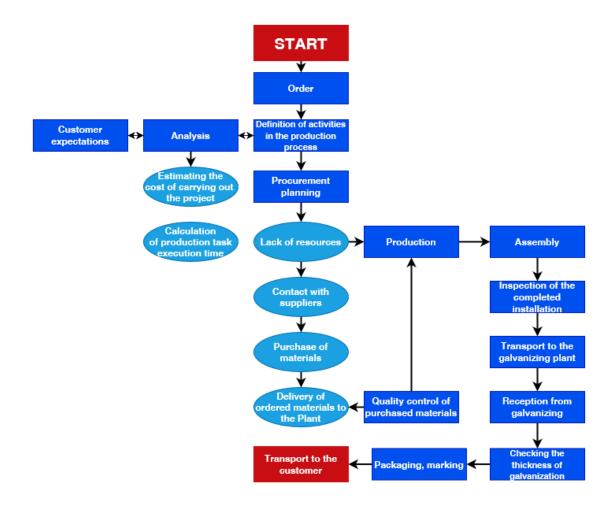


Figure 2 Manufacturing process scheme (A3)

### Module A4: Transport to consumer

Vehicle transport at distance 500 km is considered (emission standard: Euro 5) with 100% load capacity.

#### Modules C and D: End-of-life (EOL)

Due to the fact that the declaration covers a wide range of steel products for various purposes and usage scenarios, it is not possible to directly specify the de-construction technology and the amount of energy for disassembly in C1 module (so this module is very generic based on literature). In the adapted end-of-life scenario, the de-constructed steel products are transported to a steel mill distant by 100 km on > 16t lorry EURO 5 where are used as steel scrap to produce a new steel. The recycling potential of C3 module is 98% and it is assumed that 20% of the products will end up in a landfill – C4 module (Table 2). Module D presents credits resulting from the recycling of the steel scrap (used for steel production), calculated in accordance with the approach developed by World Steel Association.

Table 1 End-of-life scenario for the hot-dip galvanized steel structural components

Material	Material recovery	Recycling	Landfilling
hot-dip galvanized steel structural components	100%	80%	20%

Electricity at end-of-life (module C) has been modelled using an average Polish electricity mix as the location where the product reaches end-of-life is unknown.

#### Data collection period

The data for manufacture of the declared products refer to period between 01.01.2022 – 31.12.2022 (1 year). The life cycle assessments were prepared for Poland and Europe as reference area.

#### **Data quality**

The data selected for LCA originate from ITB-LCI questionnaires completed by Necks IMP Sp. z o.o. and verified during data audit. No data collected is older than five years and no generic datasets used are older than ten years. The representativeness, completeness, reliability, and consistency is judged as good. The background data for the processes come from the following resources database Ecoinvent v.3.9.1 (steel, aluminium, cast iron, copper, carbon fibre reinforced plastic, concrete, textile, insulators). Specific (LCI) data quality analysis was a part of the input data verification. Where no background data was available, data gaps were complemented by manufacturer information and literature research.

## **Assumptions and estimates**

The impacts of the representative products were aggregated using weighted average.

#### Calculation rules

LCA was performed using ITB-LCA tool developed in accordance with EN 15804+A2. Emission of greenhouse gases was calculated using the IPCC 2013 GWP method with a 100-year horizon. Emission of acidifying substances, Emission of substances to water contributing to oxygen depletion, Emission of gases that contribute to the creation of ground-level ozone, Abiotic depletion, and ozone depletion emissions where all calculated with the CML-IA baseline method

#### Additional information

Polish electricity (Ecoinvent v 3.9.1 supplemented by actual national KOBiZE data) emission factor used is 0.702 kg CO<sub>2</sub>/kWh. As a general rule, no particular environmental or health protection measures other than those specified by law are necessary. The recycled content in the product entering production was estimated at 65%.

# LIFE CYCLE ASSESSMENT (LCA) - Results

#### **Declared unit**

The declaration refers to declared unit (DU) - 1 kg of hot-dip galvanized steel structural components produced in Europe. The following life cycle modules (Table 2) were included in the analysis. The following tables 3-6 show the environmental impacts of the life cycle of selected modules (A1-A5+C1-C4+D).

Table 2 System boundaries for the environmental characteristic of the product.

<i>abic</i> 2	Environmental assessment information (MD – Module Declared, MND – Module Not Declared, INA – Indicator Not Assessed)															
Pro	duct sta	age	Constr proc			Use stage							End of life			
Raw material supply	Transport	Manufacturing	Transport to construction site	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential
<b>A</b> 1	A2	А3	A4	A5	B1	B2	В3	В4	В5	В6	В7	C1	C2	СЗ	C4	D
MD	MD	MD	MD	MD	MND	MND	MND	MND	MND	MND	MND	MD	MD	MD	MD	MD

Table 3 Life cycle assessment (LCA) results for specific product – environmental impacts (DU: 1 kg)

Table o Life by old addocomonic	120,1,7000,10	o ror opcome	product t	, , , , , , , , , , , , , , , , , , ,	ii iii paoto (B	<u>0. , ng</u> /	1	1	1	1	1	1
Indicator	Unit	<b>A</b> 1	A2	А3	A1-A3	A4	A5	C1	C2	<b>C</b> 3	C4	D
Global Warming Potential	eq. kg CO <sub>2</sub>	1.50E+00	8.57E-02	5.44E+00	7.02E+00	8.34E-02	3.51E-02	7.02E-03	1.67E-02	1.33E-02	1.16E-03	-4.93E-01
Greenhouse potential - fossil	eq. kg CO <sub>2</sub>	1.52E+00	8.55E-02	5.43E+00	7.03E+00	8.31E-02	3.51E-02	7.02E-03	1.66E-02	1.33E-02	1.16E-03	-4.86E-01
Greenhouse potential - biogenic	eq. kg CO <sub>2</sub>	-1.87E-02	1.62E-04	5.70E-03	-1.28E-02	2.84E-04	1.00E-03	2.00E-04	5.68E-05	4.55E-05	2.95E-06	-9.92E-03
Global warming potential - land use and land use change	eq. kg CO <sub>2</sub>	1.42E-03	4.72E-05	1.05E-04	1.57E-03	3.26E-05	1.20E-05	2.40E-06	6.52E-06	5.22E-06	1.09E-06	-3.39E-04
Stratospheric ozone depletion potential	eq. kg CFC 11	1.26E-06	1.84E-08	7.43E-09	1.28E-06	1.92E-08	7.00E-10	1.40E-10	3.85E-09	3.08E-09	4.69E-10	-1.60E-08
Soil and water acidification potential	eq. mol H+	2.04E-02	1.50E-03	3.91E-03	2.58E-02	3.37E-04	3.80E-04	7.60E-05	6.75E-05	5.40E-05	1.09E-05	-3.99E-03
Eutrophication potential - freshwater	eq. kg P	7.10E-04	4.34E-06	2.96E-04	1.01E-03	5.59E-06	6.50E-05	1.30E-05	1.12E-06	8.94E-07	1.08E-07	-5.06E-04
Eutrophication potential - seawater	eq. kg N	1.47E-02	3.79E-04	3.96E-04	1.55E-02	1.02E-04	5.50E-05	1.10E-05	2.04E-05	1.63E-05	3.79E-06	-4.81E-04
Eutrophication potential - terrestrial	eq. mol N	7.58E-02	4.20E-03	1.18E-02	9.18E-02	1.11E-03	4.65E-04	9.30E-05	2.22E-04	1.78E-04	4.15E-05	-3.34E-03
Potential for photochemical ozone synthesis	eq. kg NMVOC	6.97E-03	1.12E-03	2.48E-03	1.06E-02	3.40E-04	1.30E-04	2.60E-05	6.80E-05	5.44E-05	1.21E-05	-2.34E-04
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	5.48E-05	2.16E-07	8.07E-06	6.31E-05	2.95E-07	1.67E-07	3.34E-08	5.89E-08	4.71E-08	2.66E-09	-1.06E-05
Abiotic depletion potential - fossil fuels	MJ	2.10E+01	1.18E+00	3.00E+00	2.52E+01	1.23E+00	5.80E-01	1.16E-01	2.47E-01	1.97E-01	3.18E-02	-6.16E+00
Water deprivation potential	eq. m <sup>3</sup>	7.49E-01	4.59E-03	8.53E-02	8.39E-01	5.70E-03	1.20E-02	2.40E-03	1.14E-03	9.13E-04	1.01E-04	-4.20E-02

Table 4 Life cycle assessment (LCA) results for specific product – additional impacts indicators (DU: 1 kg)

Indicator	Unit	A1-A3	A4-A5	C1-C4	D
Particulate matter	disease incidence	INA	INA	INA	INA
Potential human exposure efficiency relative to U235	eg. kBq U235	INA	INA	INA	INA
Potential comparative toxic unit for ecosystems	CTUe	INA	INA	INA	INA
Potential comparative toxic unit for humans (cancer effects)	CTUh	INA	INA	INA	INA
Potential comparative toxic unit for humans (non-cancer effects)	CTUh	INA	INA	INA	INA
Potential soil quality index	dimensionless	INA	INA	INA	INA

Table 5 Life cycle assessment (LCA) results for specific product - the resource use (DU: 1 kg)

Indicator	Unit	A1	A2	А3	A1-A3	A4	A5	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	2.23E+00	9.56E-03	1.82E-01	2.42E+00	1.77E-02	4.30E-02	8.60E-03	3.54E-03	2.83E-03	2.76E-04	-5.85E-01
Consumption of renewable primary energy resources used as raw materials	MJ	0.00E+00										
Total consumption of renewable primary energy resources	MJ	2.23E+00	1.62E-02	2.20E-01	2.46E+00	1.77E-02	4.30E-02	8.60E-03	3.54E-03	2.83E-03	2.76E-04	-5.85E-01
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	2.11E+01	6.66E-01	2.46E+00	2.42E+01	1.23E+00	5.82E-01	1.16E-01	2.47E-01	1.97E-01	0.00E+00	-7.08E+00
Consumption of non-renewable primary energy resources used as raw materials	MJ	0.00E+00										
Total consumption of non-renewable primary energy resources	MJ	2.11E+01	1.22E+00	3.06E+00	2.53E+01	1.23E+00	5.82E-01	1.16E-01	2.47E-01	1.97E-01	3.18E-02	-7.08E+00
Consumption of secondary materials	kg	6.50E-01	2.23E-04	2.80E-04	6.50E-01	4.14E-04	5.30E-05	1.06E-05	8.27E-05	6.62E-05	6.68E-06	5.09E-01
Consumption of renew. secondary fuels	MJ	2.24E-02	2.46E-06	1.37E-06	2.24E-02	4.56E-06	2.95E-07	5.91E-08	9.11E-07	7.29E-07	1.74E-07	-1.03E+00
Consumption of non-renewable secondary fuels	MJ	3.60E-02	0.00E+00	1.97E-03	3.79E-02	0.00E+00	4.70E-04	9.39E-05	0.00E+00	0.00E+00	0.00E+00	-1.88E-04
Net consumption of freshwater	m³	1.17E-02	9.48E-05	3.94E-03	1.57E-02	1.55E-04	1.58E-04	3.15E-05	3.10E-05	2.48E-05	3.48E-05	4.72E-05

Table 6 Life cycle assessment (LCA) results for specific product – waste categories (DU: 1 kg)

Indicator	Unit	A1	A2	А3	A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste	kg	2.82E-02	7.48E-04	1.49E-03	3.04E-02	1.38E-03	6.00E-06	1.20E-06	2.77E-04	2.21E-04	3.37E-05	-8.23E-03
Non-hazardous waste	kg	1.10E+00	1.46E-02	1.14E-02	1.13E+00	2.46E-02	3.12E-04	6.24E-05	4.92E-03	3.93E-03	4.76E-04	-3.04E-01
Radioactive waste	kg	7.08E-05	3.65E-06	3.46E-06	7.79E-05	9.21E-08	4.35E-07	8.70E-08	1.84E-08	1.47E-08	2.11E-07	-5.19E-03
Components for re-use	kg	7.87E-05	0.00E+00	0.00E+00	7.87E-05	0.00E+00						
Materials for recycling	kg	5.57E-03	2.06E-06	7.47E-02	8.03E-02	3.82E-06	6.00E-07	1.20E-07	7.64E-07	6.11E-07	6.36E-08	0.00E+00
Materials for energy recovery	kg	7.04E-06	1.67E-08	1.00E-05	1.71E-05	3.09E-08	5.25E-09	1.05E-09	6.18E-09	4.94E-09	7.53E-10	0.00E+00
Exported Energy	MJ	9.91E-03	0.00E+00	7.93E-03	1.78E-02	0.00E+00	1.73E-03	3.46E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00

#### Verification

The process of verification of this EPD is in accordance with ISO 14025 and ISO 21930. After verification, this EPD is valid for a 5-year-period. EPD does not have to be recalculated after 5 years, if the underlying data have not changed significantly.

The basis for LCA analysis was EN 15804 and ITB PCR A							
·							
	0.44005 /     0.40						
Independent verification corresponding to IS	O 14025 (sub clause 8.1.3.)						
x external	☐ internal						
Oxterrial	Писти						
External verification of EPD: Halina Prejzner,	DhD Eng						
External verification of LFD. Halina Frejzher,	, FIID. LIIg.						
LCI audit and verification: Michał Chwedaczu	LCI audit and verification: Michał Chwedaczuk, M.Sc. Eng.						
·							
LCA, LCI audit and input data verification: M	ichał Plasecki, PhD., D.Sc., Eng.						

Note 1: The declaration owner has the sole ownership, liability, and responsibility for the information provided and contained in EPD. Declarations of construction products may not be comparable if they do not comply with EN 15804+A2. For further information about comparability, see EN 15804+A2 and ISO 14025.

Note 2: Note: ITB is a public Research Organization and Notified Body (EC Reg. no 1488) to the European Commission and to other Member States of the European Union designated for the tasks concerning the assessment of building products' performance. ITB acts as the independent, third-party verification organization (ISO 17025/17065/17029). ITB-EPD program is recognized and registered member of The European Platform - Association of EPD program operators and ITB-EPD declarations are registered and stored in the international ECO-PORTAL.

#### Normative references

- ITB PCR A General Product Category Rules for Construction Products
- EN 1090-2:2018 Execution of steel structures and aluminium structures Technical requirements for steel structures
- PN-EN 1090-1+A1:2012 Wykonanie konstrukcji stalowych i aluminiowych -- Część 1: Zasady oceny zgodności elementów konstrukcyjnych
- ISO 14025:2006, Environmental labels and declarations Type III environmental declarations Principles and procedures
- ISO 21930:2017 Sustainability in buildings and civil engineering works Core rules for environmental product declarations of construction products and services
- ISO 14044:2006 Environmental management Life cycle assessment Requirements and guidelines
- ISO 15686-1:2011 Buildings and constructed assets Service life planning Part 1: General principles and framework
- ISO 15686-8:2008 Buildings and constructed assets Service life planning Part 8: Reference service life and service-life estimation
- EN 15804:2012+A2:2019 Sustainability of construction works Environmental product declarations –
   Core rules for the product category of construction products
- ISO 14067:2018 Greenhouse gases Carbon footprint of products Requirements and guidelines for quantification
- PN-EN 15942:2012 Sustainability of construction works Environmental product declarations Communication format business-to-business
- ISO 20915:2018 Life cycle inventory calculation methodology for steel products
- KOBiZE Wskaźniki emisyjności CO<sub>2</sub>, SO<sub>2</sub>, NO<sub>x</sub>, CO i pyłu całkowitego dla energii elektrycznej. December 2021
- World Steel Association 2017 Life Cycle inventory methodology report for steel products





Thermal Physics, Acoustics and Environment Department
02-656 Warsaw, Ksawerów 21

# CERTIFICATE № 532/2023 of TYPE III ENVIRONMENTAL DECLARATION

Products:

Hot-dip galvanized steel structural components

Manufacturer:

Necks IMP Sp. z o.o.

ul. Małgorzatowo 4E, 87-162, Lubicz Dolny, Poland

confirms the correctness of the data included in the development of Type III Environmental Declaration and accordance with the requirements of the standard

#### EN 15804+A2

Sustainability of construction works.

Environmental product declarations.

Core rules for the product category of construction products.

This certificate, issued on 20th October 2023 is valid for 5 years or until amendment of mentioned Environmental Declaration

Head of the Thermal Physic, Acoustics //apd\_Environment Department

Agnieszka Winkler-Skalna, PhD

Deputy Director for Research and Innovation

Krzysztof Kuczyński, PhD

Warsaw, October 2023