



Issuance date: 15.12.2023
Validity date: 15.12.2028

PAF 77 SI system - doors, outwards opening window and inwards opening window



Owner of the EPD:

FP Alu-glas A/S
Address: Hjortevej 4
DK-7800 Skieve, Denmark
Website: www.fpgruppen.dk
Contact: fp@fpgruppen.dk

EPD Program Operator:

Building Research Institute (ITB)
Address: Filtrowa 1
00-611 Warsaw, Poland
Website: www.itb.pl
Contact: energia@itb.pl

ITB is the verified member of The European Platform for EPD program operators and LCA practitioner www.eco-platform.org

Basic information

This declaration is the Type III Environmental Product Declaration (EPD) based on EN 15804+A2 and verified according to ISO 14025 by an external auditor. It contains the information on the impacts of the declared construction materials on the environment and their aspects verified by the independent body according to ISO 14025. Basically, comparison or evaluation of EPD data is possible only if all the compared data were created according to EN 15804+A2.

Life cycle analysis (LCA): A1-A3, B4-B6, C1-C4 and D modules in accordance with EN 15804+A2 (Cradle-to-Gate with options)

The year of preparing the EPD: 2023

Product standard: EN 14351-1+A2

Service Life: 50 years

PCR: ITB-PCR A v. 1.6

Functional unit: 1 m²

Reasons for performing LCA: B2B

Representativeness: European

MANUFACTURER

FP Alu-glas A/S design, manufacture, and install unitised facades, facadeing, bolted structural glazing, entrances, commercial window, and door systems, and others advanced building products. FP Alu-glas PAF 77 is doors and windows systems with design possibilities for quick closure of the building envelope. FP Alu-glas A/S produces windows and doors which can be built together in many different ways for the costumers individual specifications. The elements are mainly sold to customers in Denmark, Faroe Island, Iceland and Greenland.

FP Alu-glas is the manufacturing plant within the group. The company is located in Skive. The production facilities including warehouse covers an area of 10.000 m².


PRODUCTS DESCRIPTION AND APPLICATION

Product pictures of FP Alu-glas:


PAF77 Doors, PAF77 Outwards opening window and PAF 77 Inwards opening window.

All aluminium profiles are based on Hydro 4.0 (Reduxa) EPD: NEPD-1840-468-EN.


Doors

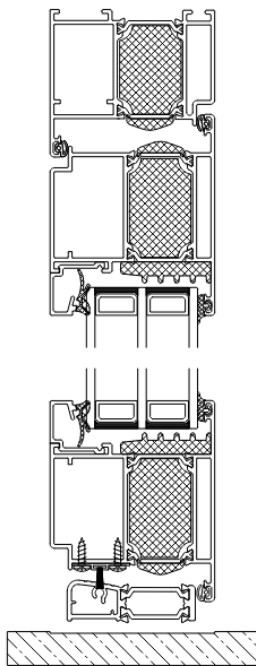

Outwards opening window



Inwards opening window



The technical specifications of PAF 77 doors and windows produced by FP Alu-glas A/S are presented in Tab. 1.

Type III Environmental Product Declaration No. 553/2023

Table 1. The specification of PAF 77 doors and windows produced by FP Alu-glas A/S.

Type of material	Percentage in material groups:		
	doors	outwards opening window	inwards opening window
Glass	68.6	66.1	60.2
Stell element	4.8	3.5	5.2
Aluminium	22.8	25.7	28.4
Rubber	2.6	2.7	4.4
PVC	0.1	0.3	0.2
ESP	0.4	0.6	0.6
Insulating bars	0.8	1.2	1.1

More information can be found on the FP Alu-glas A/S website:

<https://fpgruppen.dk>

LIFE CYCLE ASSESSMENT (LCA) – general rules applied

Allocation

The allocation rules used for this EPD are based on EN 15804 + A2 and ITB-PCRA v 1.6. Production of FP Alu-glas PAF 77 doors and windows is a line process conducted in the manufacturing plant located in Skive (Denmark). All impacts from raw materials extraction and processing are allocated in A1 module of EPD. Input and output data from the production is inventoried and allocated to the production on the mass basis. Water and energy consumption, associated emissions and generated wastes are allocated to module A3. Energy supply was inventoried for whole production process. Packaging materials were taken into consideration.

System boundary

The life cycle analysis (LCA) of the declared products covers: product stage – modules A1-A3, use stage – modules B4-B6, end of life – modules C1-C4 and benefits and loads beyond the system boundary – module D (cradle-to-gate with options). Energy and water consumption, emissions as well as information on generated wastes were inventoried and were included in the calculations. It can be assumed that the total sum of omitted processes does not exceed 5% of all impact categories. In accordance with EN 15804 + A2, machines and facilities (capital goods) required for the production as well as transportation of employees were not included in LCA.



Fig. 1. A scheme of FP Alu-glas PAF 77 doors and windows.

System limits

Minimum 99.0 % input materials and 99.9 % energy consumption (electricity, gas or Diesel) were inventoried in a processing plant and were included in the calculation. In the assessment, all significant parameters from gathered production data are considered, i.e. all material used per formulation, utilized thermal energy, and electric power consumption, direct production waste and available emission measurements. Tires consumption for transport was not considered. Substances with a percentage share of less than 0.1 % of total mass were excluded from the calculations. The packaging products (wooden pallets) are included.

Modules A1 and A2 : *Raw materials supply and transport*

Aluminium profiles are produced on Hydro's factory in Denmark (ca. 230 km). Glass and small accessories are produced in Denmark, Poland or Germany (above 1000 km). Data on transport of the different products to the manufacturing plants is collected and modelled for factory by assessor. Means of transport include lorries (> 16 t). Based on data provided by the manufacturer, all input of transport resources was inventoried. For A2 module (transport) European averages for fuel data are applied.

Module A3 : *Production*

A scheme of FP Alu-glas PAF 77 doors and windows production process is presented in Fig. 1. After anodizing or powder coating aluminium surface treatment which is done by external supplier in Denmark, the profiles are transported (ca. 70 km) to the production facility in Skive. There, these profiles are CNC machined into correct lengths, holes are drilled and the frames are put together and mounted with glass and fittings for facade system.

Module B4-B6 : *Use stage*

In the use stage all impacts related to the use of the FP Alu-glas PAF 77 doors and windows over its entire life cycle. This includes provisions for the transport of all materials as well as the energy and water impact associated with use of it. If the product contains at least one insulating glass unit, changing it at least once every 30 years shall be included in Module B4. There are no consumables, maintenance, repair, replacements or refurbishments related to the use of the PAF 77 doors and windows for the period of the reference service life. PAF 77 doors and windows do not use energy or water during their service life. There are no emissions released from the product during the use. There are no energy uses to operate building integrated technical systems like energy use for electrical components e.g. electrical motors. Replacement of the product due to aesthetic reasons (change of interior design) and not related to the loss of performance is not taken into account. Therefore, modules B5-B6 have zero impacts.

Modules C1-C4 and D : *End-of-life (EoL)*

It is assumed that at the end-of-life, 100 % of FP Alu-glas PAF 77 doors and windows are demounted using electric tools. Materials recovered from dismantled products are recycled, incinerated (module C3) and landfilled (module C4) according to the realistic treatment practice (mass allocation) of industrial waste what is presented in Table 3. 95 % of the resulting aluminium undergo recycling after sorting and cutting while the remaining 5 % is forwarded to landfill as mixed construction and

Type III Environmental Product Declaration No. 553/2023

demolition wastes. In turn, 60 % non-glass and non-aluminium components and 30 % glass undergo waste processing while the remaining are forwarded to landfill in the form of mixed construction and demolition wastes. A potential credit resulting from the recycling of aluminium, glass and non-glass and non-aluminium components are presented in module D. Utilization of packaging material which constitute less than 1 % of the total system flows was not taken into consideration.

Table 2. End-of-life scenario for FP Alu-glas PAF 77 doors and windows components.

Material	Waste processing		Landfilling
	Material recovery (reuse, recycling)	Energy recovery (incineration)	
aluminium	95 %	0 %	5 %
glass	30 %	0 %	70 %
non glass and aluminium	30 %	30 %	40 %

Data quality

The data selected for LCA analysis originates from ITB-LCI questionnaires completed by FP Alu-glas using the inventory data, ITB and Ecoinvent database v. 3.9.1. No specific data collected is older than five years and no generic datasets used are older than ten years. The representativeness, completeness, reliability, and consistency are judged as sufficient for calculations. Data for Danish electricity was supported by Ecoinvent database v. 3.9.1. Specific EPDs were used for hydro aluminium, glass or steel element. Environmental characteristics that were not included in these EPDs were taken from the Ecoinvent database.

Data collection period

The data for manufacture of the declared products refers to period between 01.07.2021 – 30.06.2022 (1 year). The life cycle assessments were prepared for Europe as reference area.

Assumptions and estimates

Impacts were inventoried and calculated for FP Alu-glas PAF 77 doors and windows at the production site located in Skive which are a standard and representative for the 3 layer glass FP Alu-glas PAF 77 doors and windows system.

Additional information

Danish electricity (Ecoinvent v. 3.9.1) emission factors were used. As a general rule, no particular environmental or health protection measures other than those specified by law are necessary.

Calculation rules

LCA was performed using ITB-LCA tool developed in accordance with EN 15804 + A2.

Databases


The data for the processes comes from Ecoinvent v. 3.9.1 and ITB-Database. Specific data quality analysis was a part of external audit.

LIFE CYCLE ASSESSMENT (LCA) – Results

Declared unit

The declaration refers to declared unit (DU) – 1 m² of reference FP Alu-glas PAF 77 window and door element, as shown in Figure 2.

Figure 2: Representative door (upper) and window (lower) element used as reference for the declared unit, dimension for door 2,18 m x 1,23 m (2,68 m²) and window 1,48 m x 1,23 m (1,82 m²).

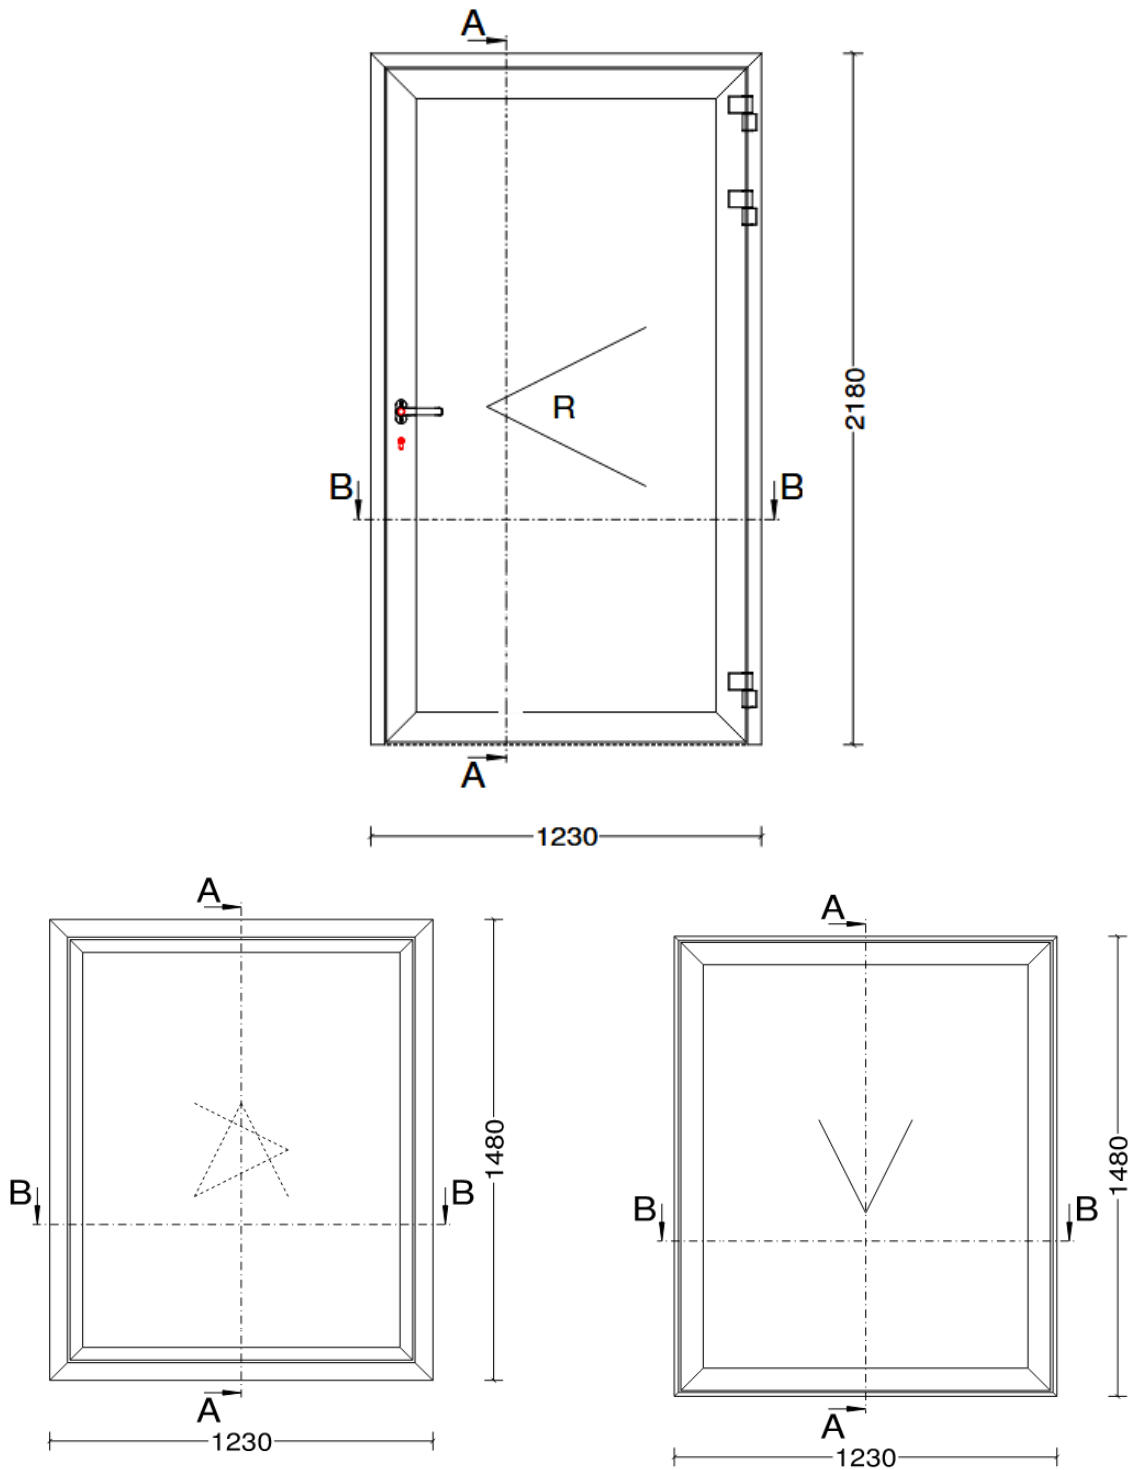

Type III Environmental Product Declaration No. 553/2023

Table 3. System boundaries for the environmental characteristic of FP Alu-glas PAF 77 doors and windows.

Environmental assessment information (MD – Module Declared, MND – Module Not Declared, INA – Indicator Not Assessed)																
Product stage			Construction process		Use stage							End of life				Benefits and loads beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport to construction site	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
MD	MD	MD	MND	MND	MND	MND	MND	MD	MD	MD	MND	MD	MD	MD	MD	MD

Type III Environmental Product Declaration No. 553/2023

Table 4. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 door – environmental impacts

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Global Warming Potential total	eq. kg CO ₂	1.28E+02	5.31E+00	5.82E+00	1.39E+02	4.83E+01	0.00E+00	0.00E+00	5.15E-02	2.99E-01	1.48E+00	3.59E-01	-4.99E+01
Greenhouse gas potential - fossil	eq. kg CO ₂	1.32E+02	5.29E+00	5.64E+00	1.43E+02	4.79E+01	0.00E+00	0.00E+00	4.80E-02	2.98E-01	1.08E+00	3.56E-01	-5.01E+01
Greenhouse gas potential - biogenic	eq. kg CO ₂	-4.73E+00	1.81E-02	1.70E-01	-4.54E+00	3.78E-01	0.00E+00	0.00E+00	3.31E-03	1.02E-03	3.99E-01	3.26E-03	1.59E-01
Global warming potential - land use and land use change	eq. kg CO ₂	1.50E-01	2.08E-03	7.86E-03	1.60E-01	1.82E-02	0.00E+00	0.00E+00	1.52E-04	1.17E-04	5.27E-04	2.68E-04	-6.88E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	1.00E-05	1.23E-06	1.10E-06	1.23E-05	1.66E-06	0.00E+00	0.00E+00	1.04E-09	6.90E-08	8.14E-08	9.71E-08	-4.51E-06
Soil and water acidification potential	eq. mol H ⁺	1.91E+00	2.15E-02	1.67E-02	1.95E+00	4.65E-01	0.00E+00	0.00E+00	1.88E-04	1.21E-03	4.11E-03	2.57E-03	-2.47E-01
Eutrophication potential - freshwater	eq. kg P	3.32E-02	3.56E-04	1.97E-03	3.56E-02	7.05E-03	0.00E+00	0.00E+00	3.81E-05	2.00E-05	1.63E-04	2.99E-05	-1.82E-02
Eutrophication potential - seawater	eq. kg N	4.80E-01	6.49E-03	3.90E-03	4.90E-01	7.66E-02	0.00E+00	0.00E+00	4.55E-05	3.65E-04	1.54E-03	1.25E-03	-3.02E-01
Eutrophication potential - terrestrial	eq. mol N	5.71E+00	7.08E-02	4.12E-02	5.82E+00	9.20E-01	0.00E+00	0.00E+00	5.18E-04	3.98E-03	1.44E-02	9.93E-03	-3.15E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	1.56E+00	2.17E-02	1.23E-02	1.60E+00	2.54E-01	0.00E+00	0.00E+00	1.22E-04	1.22E-03	4.07E-03	2.87E-03	-9.54E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	2.60E-02	1.88E-05	1.70E-05	2.60E-02	5.18E-04	0.00E+00	0.00E+00	3.17E-07	1.06E-06	1.33E-05	9.53E-07	-3.27E-05
Abiotic depletion potential - fossil fuels	MJ	1.42E+03	7.86E+01	1.37E+02	1.64E+03	5.49E+02	0.00E+00	0.00E+00	8.10E-01	4.42E+00	7.30E+00	7.00E+00	-4.02E+02
Water deprivation potential	eq. m ³	8.54E+01	3.63E-01	2.08E+00	8.79E+01	1.18E+01	0.00E+00	0.00E+00	3.46E-02	2.05E-02	1.59E-01	3.22E-02	-4.07E+01

Type III Environmental Product Declaration No. 553/2023

Table 5. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 door – additional impacts indicators

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Particulate matter	disease incidence	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential human exposure efficiency relative to U235	eg. kBq U235	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential comparative toxic unit for ecosystems	CTUe	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential comparative toxic unit for humans (cancer effects)	CTUh	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential comparative toxic unit for humans (non-cancer effects)	CTUh	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential soil quality index	dimensionless	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA

Table 6. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 door - the resource use

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	9.03E+02	1.13E+00	3.97E+01	9.44E+02	3.49E+01	0.00E+00	0.00E+00	7.91E-01	6.35E-02	3.56E-01	0.00E+00	-7.11E+02
Consumption of renewable primary energy resources used as raw materials	MJ	3.54E+01	0.00E+00	0.00E+00	3.54E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total consumption of renewable primary energy resources	MJ	9.38E+02	1.13E+00	3.97E+01	9.79E+02	3.49E+01	0.00E+00	0.00E+00	7.91E-01	6.35E-02	7.27E-01	8.32E-02	-7.11E+02
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	1.41E+03	7.86E+01	1.41E+02	1.63E+03	5.49E+02	0.00E+00	0.00E+00	8.10E-01	4.43E+00	-8.89E+01	0.00E+00	-4.19E+02
Consumption of non-renewable primary energy resources used as raw materials	MJ	3.37E+01	0.00E+00	0.00E+00	3.37E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.99E+01	0.00E+00	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	1.44E+03	7.86E+01	1.41E+02	1.66E+03	5.49E+02	0.00E+00	0.00E+00	8.10E-01	4.43E+00	7.30E+00	6.88E+00	-4.19E+02
Consumption of secondary materials	kg	1.72E+00	2.63E-02	1.84E-02	1.77E+00	1.38E-01	0.00E+00	0.00E+00	2.51E-04	1.48E-03	1.14E-02	2.41E-03	0.00E+00
Consumption of renewable secondary fuels	MJ	3.46E-01	2.90E-04	7.61E-05	3.46E-01	2.62E-02	0.00E+00	0.00E+00	1.15E-06	1.63E-05	4.57E-04	4.55E-05	0.00E+00
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m ³	3.61E+00	9.89E-03	8.09E-02	3.70E+00	3.04E-01	0.00E+00	0.00E+00	1.50E-03	5.57E-04	3.49E-03	7.77E-03	-2.80E+00

Type III Environmental Product Declaration No. 553/2023

Table 7. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 door – waste categories

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Hazardous waste neutralized	kg	1.13E+00	8.82E-02	1.72E-01	1.39E+00	6.07E-01	0.00E+00	0.00E+00	3.28E-03	4.97E-03	5.06E-02	1.14E-02	-3.77E-01
Non-hazardous waste neutralised	kg	6.57E+01	1.57E+00	9.17E+00	7.64E+01	3.06E+01	0.00E+00	0.00E+00	1.82E-01	8.82E-02	8.08E-01	1.07E+00	-1.78E+01
Radioactive waste	kg	6.40E-03	5.41E-04	5.57E-04	7.49E-03	8.95E-04	0.00E+00	0.00E+00	4.23E-06	3.05E-05	4.12E-05	4.40E-05	-2.05E-03
Components for re-use	kg	0.00E+00	0.00E+00	1.92E-04	1.92E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	3.33E-01	2.43E-04	5.22E-03	3.39E-01	7.66E-03	0.00E+00	0.00E+00	1.03E-04	1.37E-05	1.75E+01	1.63E-05	-6.86E-02
Materials for energy recovery	kg	3.19E-04	1.97E-06	1.97E-06	3.23E-04	1.79E-04	0.00E+00	0.00E+00	1.56E-08	1.11E-07	1.04E-06	4.76E-07	-8.06E-05
Energy exported	MJ	5.16E+00	8.72E-02	4.20E-01	5.66E+00	4.82E+00	0.00E+00	0.00E+00	8.09E-03	4.91E-03	2.45E+00	1.63E-02	-2.41E-01

Type III Environmental Product Declaration No. 553/2023

Table 8. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 outwards opening window – environmental impacts

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Global Warming Potential total	eq. kg CO ₂	7.52E+01	5.31E+00	5.82E+00	8.63E+01	2.70E+01	0.00E+00	0.00E+00	5.15E-02	1.78E-01	9.87E-01	2.12E-01	-3.26E+01
Greenhouse gas potential - fossil	eq. kg CO ₂	7.79E+01	5.29E+00	5.64E+00	8.89E+01	2.67E+01	0.00E+00	0.00E+00	4.80E-02	1.77E-01	7.41E-01	2.10E-01	-3.27E+01
Greenhouse gas potential - biogenic	eq. kg CO ₂	-2.78E+00	1.81E-02	1.70E-01	-2.59E+00	2.15E-01	0.00E+00	0.00E+00	3.31E-03	6.05E-04	2.45E-01	1.83E-03	1.03E-01
Global warming potential - land use and land use change	eq. kg CO ₂	8.49E-02	2.08E-03	7.86E-03	9.49E-02	1.03E-02	0.00E+00	0.00E+00	1.52E-04	6.95E-05	3.39E-04	1.51E-04	-4.49E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	5.99E-06	1.23E-06	1.10E-06	8.31E-06	9.23E-07	0.00E+00	0.00E+00	1.04E-09	4.10E-08	5.63E-08	5.46E-08	-2.94E-06
Soil and water acidification potential	eq. mol H ⁺	9.43E-01	2.15E-02	1.67E-02	9.81E-01	2.59E-01	0.00E+00	0.00E+00	1.88E-04	7.19E-04	2.73E-03	1.45E-03	-1.61E-01
Eutrophication potential - freshwater	eq. kg P	1.99E-02	3.56E-04	1.97E-03	2.23E-02	3.98E-03	0.00E+00	0.00E+00	3.81E-05	1.19E-05	1.04E-04	1.69E-05	-1.19E-02
Eutrophication potential - seawater	eq. kg N	2.92E-01	6.49E-03	3.90E-03	3.03E-01	4.27E-02	0.00E+00	0.00E+00	4.55E-05	2.17E-04	1.03E-03	7.55E-04	-1.97E-01
Eutrophication potential - terrestrial	eq. mol N	3.36E+00	7.08E-02	4.12E-02	3.47E+00	5.13E-01	0.00E+00	0.00E+00	5.18E-04	2.37E-03	9.73E-03	5.59E-03	-2.05E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	9.49E-01	2.17E-02	1.23E-02	9.83E-01	1.42E-01	0.00E+00	0.00E+00	1.22E-04	7.25E-04	2.74E-03	1.62E-03	-6.22E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	1.11E-02	1.88E-05	1.70E-05	1.11E-02	2.89E-04	0.00E+00	0.00E+00	3.17E-07	6.28E-07	8.35E-06	5.37E-07	-2.13E-05
Abiotic depletion potential - fossil fuels	MJ	8.30E+02	7.86E+01	1.37E+02	1.05E+03	3.07E+02	0.00E+00	0.00E+00	8.10E-01	2.63E+00	4.92E+00	3.94E+00	-2.62E+02
Water deprivation potential	eq. m ³	4.98E+01	3.63E-01	2.08E+00	5.23E+01	6.63E+00	0.00E+00	0.00E+00	3.46E-02	1.22E-02	1.07E-01	1.82E-02	-2.66E+01

Type III Environmental Product Declaration No. 553/2023

Table 9. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 outwards opening window – additional impacts indicators

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Particulate matter	disease incidence	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential human exposure efficiency relative to U235	eg. kBq U235	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential comparative toxic unit for ecosystems	CTUe	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential comparative toxic unit for humans (cancer effects)	CTUh	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential comparative toxic unit for humans (non-cancer effects)	CTUh	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential soil quality index	dimensionless	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA

Table 10. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 outwards opening window - the resource use

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	5.79E+02	1.13E+00	3.97E+01	6.20E+02	2.05E+01	0.00E+00	0.00E+00	7.91E-01	3.77E-02	2.52E-01	0.00E+00	-4,64E+02
Consumption of renewable primary energy resources used as raw materials	MJ	2.22E+01	0.00E+00	0.00E+00	2.22E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0,00E+00
Total consumption of renewable primary energy resources	MJ	6.02E+02	1.13E+00	3.97E+01	6.42E+02	2.05E+01	0.00E+00	0.00E+00	7.91E-01	3.77E-02	4.81E-01	4.70E-02	-4,64E+02
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	8.17E+02	7.86E+01	1.41E+02	1.04E+03	3.07E+02	0.00E+00	0.00E+00	8.10E-01	2.63E+00	-6.29E+01	0.00E+00	-2,74E+02
Consumption of non-renewable primary energy resources used as raw materials	MJ	2.70E+01	0.00E+00	0.00E+00	2.70E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.36E+01	0.00E+00	0,00E+00
Total consumption of non-renewable primary energy resources	MJ	8.44E+02	7.86E+01	1.41E+02	1.06E+03	3.07E+02	0.00E+00	0.00E+00	8.10E-01	2.63E+00	4.93E+00	3.87E+00	-2,74E+02
Consumption of secondary materials	kg	7.52E-01	2.63E-02	1.84E-02	7.96E-01	7.73E-02	0.00E+00	0.00E+00	2.51E-04	8.81E-04	7.61E-03	1.36E-03	0,00E+00
Consumption of renewable secondary fuels	MJ	3.34E-01	2.90E-04	7.61E-05	3.34E-01	1.46E-02	0.00E+00	0.00E+00	1.15E-06	9.71E-06	2.87E-04	2.59E-05	0,00E+00
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0,00E+00
Net consumption of freshwater resources	m ³	2.32E+00	9.89E-03	8.09E-02	2.41E+00	1.71E-01	0.00E+00	0.00E+00	1.50E-03	3.31E-04	2.33E-03	4.37E-03	-1,82E+00

Type III Environmental Product Declaration No. 553/2023

Table 11. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 outwards opening window – waste categories

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Hazardous waste neutralized	kg	6.88E-01	8.82E-02	1.72E-01	9.48E-01	3.43E-01	0.00E+00	0.00E+00	3.28E-03	2.95E-03	3.34E-02	6.41E-03	-2.46E-01
Non-hazardous waste neutralised	kg	3.78E+01	1.57E+00	9.17E+00	4.85E+01	1.73E+01	0.00E+00	0.00E+00	1.82E-01	5.24E-02	5.27E-01	7.41E-01	-1.16E+01
Radioactive waste	kg	3.87E-03	5.41E-04	5.57E-04	4.97E-03	5.04E-04	0.00E+00	0.00E+00	4.23E-06	1.81E-05	2.84E-05	2.48E-05	-1.34E-03
Components for re-use	kg	0.00E+00	0.00E+00	1.92E-04	1.92E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	1.60E-01	2.43E-04	5.22E-03	1.66E-01	4.41E-03	0.00E+00	0.00E+00	1.03E-04	8.14E-06	1.09E+01	9.18E-06	-4.47E-02
Materials for energy recovery	kg	2.09E-04	1.97E-06	1.97E-06	2.13E-04	9.95E-05	0.00E+00	0.00E+00	1.56E-08	6.58E-08	6.96E-07	2.66E-07	-5.26E-05
Energy exported	MJ	2.91E+00	8.72E-02	4.20E-01	3.42E+00	2.70E+00	0.00E+00	0.00E+00	8.09E-03	2.92E-03	1.72E+00	9.17E-03	-1.57E-01

Type III Environmental Product Declaration No. 553/2023

Table 12. LCA for 1 m² results of 3 layer glass FP Alu-glas PAF 77 inwards opening window – environmental impacts

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Global Warming Potential total	eq. kg CO ₂	8,65E+01	5.31E+00	5.82E+00	9,76E+01	2,58E+01	0.00E+00	0.00E+00	5.15E-02	1,99E-01	1,30E+00	2,28E-01	-3.78E+01
Greenhouse gas potential - fossil	eq. kg CO ₂	9,00E+01	5.29E+00	5.64E+00	1,01E+02	2,56E+01	0.00E+00	0.00E+00	4.80E-02	1,98E-01	1,00E+00	2,26E-01	-3.79E+01
Greenhouse gas potential - biogenic	eq. kg CO ₂	-3,61E+00	1.81E-02	1.70E-01	-3,42E+00	2,06E-01	0.00E+00	0.00E+00	3.31E-03	6,78E-04	2,97E-01	1,80E-03	1.20E-01
Global warming potential - land use and land use change	eq. kg CO ₂	1,06E-01	2.08E-03	7.86E-03	1,16E-01	9,91E-03	0.00E+00	0.00E+00	1.52E-04	7,78E-05	4,32E-04	1,48E-04	-5.21E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	7,80E-06	1.23E-06	1.10E-06	1,01E-05	8,83E-07	0.00E+00	0.00E+00	1.04E-09	4,59E-08	7,66E-08	5,35E-08	-3.41E-06
Soil and water acidification potential	eq. mol H ⁺	1,24E+00	2.15E-02	1.67E-02	1,28E+00	2,48E-01	0.00E+00	0.00E+00	1.88E-04	8,05E-04	3,59E-03	1,42E-03	-1.87E-01
Eutrophication potential - freshwater	eq. kg P	2,36E-02	3.56E-04	1.97E-03	2,59E-02	3,81E-03	0.00E+00	0.00E+00	3.81E-05	1,33E-05	1,30E-04	1,67E-05	-1.38E-02
Eutrophication potential - seawater	eq. kg N	3,43E-01	6.49E-03	3.90E-03	3,53E-01	4,09E-02	0.00E+00	0.00E+00	4.55E-05	2,43E-04	1,36E-03	8,39E-04	-2.29E-01
Eutrophication potential - terrestrial	eq. mol N	4,02E+00	7.08E-02	4.12E-02	4,13E+00	4,91E-01	0.00E+00	0.00E+00	5.18E-04	2,65E-03	1,30E-02	5,47E-03	-2.38E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	1,12E+00	2.17E-02	1.23E-02	1,15E+00	1,36E-01	0.00E+00	0.00E+00	1.22E-04	8,11E-04	3,64E-03	1,59E-03	-7.22E-01
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	1,72E-02	1.88E-05	1.70E-05	1,72E-02	2,77E-04	0.00E+00	0.00E+00	3.17E-07	7,03E-07	1,04E-05	5,25E-07	-2.48E-05
Abiotic depletion potential - fossil fuels	MJ	9,70E+02	7.86E+01	1.37E+02	1,19E+03	2,94E+02	0.00E+00	0.00E+00	8.10E-01	2,94E+00	6,56E+00	3,86E+00	-3.04E+02
Water deprivation potential	eq. m ³	6,24E+01	3.63E-01	2.08E+00	6,49E+01	6,34E+00	0.00E+00	0.00E+00	3.46E-02	1,36E-02	1,42E-01	1,79E-02	-3.08E+01

Type III Environmental Product Declaration No. 553/2023

Table 13. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 inwards opening window – additional impacts indicators

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Particulate matter	disease incidence	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential human exposure efficiency relative to U235	eg. kBq U235	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential comparative toxic unit for ecosystems	CTUe	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential comparative toxic unit for humans (cancer effects)	CTUh	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential comparative toxic unit for humans (non-cancer effects)	CTUh	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA
Potential soil quality index	dimensionless	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA	INA

Table 14. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 inwards opening window - the resource use

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	6.77E+02	1.13E+00	3.97E+01	7.18E+02	1.97E+01	0.00E+00	0.00E+00	7.91E-01	4.22E-02	3.50E-01	0.00E+00	-5.39E+02
Consumption of renewable primary energy resources used as raw materials	MJ	2.76E+01	0.00E+00	0.00E+00	2.76E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total consumption of renewable primary energy resources	MJ	7.05E+02	1.13E+00	3.97E+01	7.46E+02	1.97E+01	0.00E+00	0.00E+00	7.91E-01	4.22E-02	6.30E-01	4.65E-02	-5.39E+02
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	9.52E+02	7.86E+01	1.41E+02	1.17E+03	2.94E+02	0.00E+00	0.00E+00	8.10E-01	2.94E+00	-8.75E+01	0.00E+00	-3.18E+02
Consumption of non-renewable primary energy resources used as raw materials	MJ	3.36E+01	0.00E+00	0.00E+00	3.36E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.84E+01	0.00E+00	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	9.87E+02	7.86E+01	1.41E+02	1.21E+03	2.94E+02	0.00E+00	0.00E+00	8.10E-01	2.94E+00	6.56E+00	3.77E+00	-3.18E+02
Consumption of secondary materials	kg	1.13E+00	2.63E-02	1.84E-02	1.18E+00	7.40E-02	0.00E+00	0.00E+00	2.51E-04	9.87E-04	1.01E-02	1.33E-03	0.00E+00
Consumption of renewable secondary fuels	MJ	3.33E-01	2.90E-04	7.61E-05	3.34E-01	1.40E-02	0.00E+00	0.00E+00	1.15E-06	1.09E-05	3.56E-04	2.58E-05	0.00E+00
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m ³	2.72E+00	9.89E-03	8.09E-02	2.81E+00	1.64E-01	0.00E+00	0.00E+00	1.50E-03	3.70E-04	3.08E-03	4.28E-03	-2.12E+00

Type III Environmental Product Declaration No. 553/2023

Table 15. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 inwards opening window – waste categories

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Hazardous waste neutralized	kg	7.79E-01	8.82E-02	1.72E-01	1.04E+00	3.28E-01	0.00E+00	0.00E+00	3.28E-03	3.30E-03	4.36E-02	6.30E-03	-2.85E-01
Non-hazardous waste neutralised	kg	4.39E+01	1.57E+00	9.17E+00	5.47E+01	1.66E+01	0.00E+00	0.00E+00	1.82E-01	5.86E-02	6.80E-01	9.99E-01	-1.35E+01
Radioactive waste	kg	4.68E-03	5.41E-04	5.57E-04	5.78E-03	4.83E-04	0.00E+00	0.00E+00	4.23E-06	2.03E-05	3.86E-05	2.43E-05	-1.55E-03
Components for re-use	kg	0.00E+00	0.00E+00	1.92E-04	1.92E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	2.28E-01	2.43E-04	5.22E-03	2.33E-01	4.23E-03	0.00E+00	0.00E+00	1.03E-04	9.11E-06	1.35E+01	9.00E-06	-5.19E-02
Materials for energy recovery	kg	2.15E-04	1.97E-06	1.97E-06	2.19E-04	9.52E-05	0.00E+00	0.00E+00	1.56E-08	7.37E-08	9.19E-07	2.58E-07	-6.10E-05
Energy exported	MJ	2.88E+00	8.72E-02	4.20E-01	3.38E+00	2.58E+00	0.00E+00	0.00E+00	8.09E-03	3.27E-03	2.38E+00	8.97E-03	-1.82E-01

Type III Environmental Product Declaration No. 553/2023

ANNEX for EN 15804:2013+A1

Characterization factors for EN 15804:2013+A1 comes from Ecoinvent CML v. 4.8 and ITB-Database.

Table 16. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 door – environmental impacts

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Global Warming Potential	eq. kg CO ₂	1.29E+02	5.96E+00	5.99E+00	1.41E+02	4.84E+01	0.00E+00	0.00E+00	4.84E-02	3.36E-01	2.34E+00	3.76E-01	-4.99E+01
Depletion potential of the stratospheric ozone layer	eq. kg CFC 11	1.12E-05	1.07E-07	3.11E-07	1.16E-05	8.84E-07	0.00E+00	0.00E+00	9.27E-10	6.03E-09	1.84E-08	6.77E-09	-4.51E-06
Acidification potential of soil and water	eq. kg SO ₂	1.41E+00	1.49E-02	1.14E-02	1.44E+00	3.81E-01	0.00E+00	0.00E+00	1.45E-04	8.39E-04	6.98E-03	1.76E-03	-2.47E-01
Eutrophication potential	eq. kg (PO ₄) ⁻³	2.89E-01	3.84E-03	7.93E-03	3.01E-01	5.34E-02	0.00E+00	0.00E+00	1.40E-04	2.16E-04	4.16E-03	3.38E-03	-1.82E-02
Formation potential of tropospheric ozone	eq. kg Ethene	8.07E-02	1.40E-03	1.09E-03	8.32E-02	1.93E-02	0.00E+00	0.00E+00	1.07E-05	7.86E-05	7.20E-04	1.55E-04	-1.32E-02
Abiotic depletion potential (ADP-elements) for non-fossil resources	eq. kg Sb	1.16E-02	1.93E-05	1.68E-05	1.16E-02	4.31E-04	0.00E+00	0.00E+00	3.16E-07	1.08E-06	1.07E-05	6.37E-07	-3.27E-05
Abiotic depletion potential (ADP-fossil fuels) for fossil resources	MJ	1.32E+03	8.38E+01	1.27E+02	1.53E+03	5.11E+02	0.00E+00	0.00E+00	5.42E-01	4.72E+00	1.97E+01	7.25E+00	-4.02E+02

Type III Environmental Product Declaration No. 553/2023

Table 17. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 door - the resource use

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	8.60E+02	1.32E+00	3.97E+01	9.01E+02	3.50E+01	0.00E+00	0.00E+00	7.91E-01	7.42E-02	7.28E-01	9.10E-02	-7.11E+02
Consumption of renewable primary energy resources used as raw materials	MJ	4.77E+01	0.00E+00	0.00E+00	4.77E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total consumption of renewable primary energy resources	MJ	9.07E+02	1.32E+00	3.97E+01	9.48E+02	3.50E+01	0.00E+00	0.00E+00	7.91E-01	7.42E-02	7.28E-01	9.10E-02	-7.11E+02
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	1.39E+03	8.57E+01	9.88E+01	1.57E+03	5.53E+02	0.00E+00	0.00E+00	8.10E-01	4.82E+00	-8.89E+01	-1.29E+01	-4.19E+02
Consumption of non-renewable primary energy resources used as raw materials	MJ	3.21E+01	0.00E+00	4.15E+01	7.36E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.99E+01	2.02E+01	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	1.42E+03	8.57E+01	1.40E+02	1.65E+03	5.53E+02	0.00E+00	0.00E+00	8.10E-01	4.82E+00	7.30E+00	7.35E+00	-4.19E+02
Consumption of secondary materials	kg	2.08E+00	3.86E-02	2.04E-02	2.13E+00	1.45E-01	0.00E+00	0.00E+00	2.51E-04	2.17E-03	1.15E-02	2.70E-03	0.00E+00
Consumption of renewable secondary fuels	MJ	4.34E-01	4.90E-04	6.85E-05	4.35E-01	2.63E-02	0.00E+00	0.00E+00	1.15E-06	2.76E-05	4.57E-04	4.57E-05	0.00E+00
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m ³	3.99E+00	1.02E-02	7.88E-02	4.08E+00	3.04E-01	0.00E+00	0.00E+00	1.50E-03	5.75E-04	3.48E-03	7.67E-03	-2.80E+00

Table 18. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 door – waste categories

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Hazardous waste neutralized	kg	4.29E+00	5.74E-02	1.77E-01	4.52E+00	5.91E-01	0.00E+00	0.00E+00	3.28E-03	3.23E-03	4.74E-02	4.88E-03	-3.77E-01
Non-hazardous waste neutralised	kg	1.23E+02	1.75E+00	9.36E+00	1.34E+02	3.07E+01	0.00E+00	0.00E+00	1.82E-01	9.83E-02	8.09E-01	1.07E+00	-1.78E+01
Radioactive waste	kg	3.97E-03	2.76E-05	2.16E-04	4.22E-03	6.19E-04	0.00E+00	0.00E+00	4.23E-06	1.56E-06	1.52E-05	1.40E-06	-2.05E-03
Components for re-use	kg	0.00E+00	0.00E+00	1.92E-04	1.92E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	2.56E-01	6.27E-04	5.27E-03	2.62E-01	7.87E-03	0.00E+00	0.00E+00	1.03E-04	3.53E-05	1.75E+01	3.99E-05	0.00E+00
Materials for energy recovery	kg	1.81E-04	5.26E-06	1.51E-06	1.88E-04	1.80E-04	0.00E+00	0.00E+00	1.56E-08	2.96E-07	1.01E-06	4.90E-07	0.00E+00
Energy exported	MJ	1.69E+00	3.19E-02	4.08E-01	2.13E+00	1.56E+00	0.00E+00	0.00E+00	8.09E-03	1.80E-03	2.43E+00	1.43E-03	0.00E+00

Type III Environmental Product Declaration No. 553/2023

Table 19. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 outwards opening window – environmental impacts

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Global Warming Potential	eq. kg CO ₂	7.54E+01	5.96E+00	5.99E+00	8.73E+01	2.70E+01	0.00E+00	0.00E+00	4.84E-02	1.99E-01	1.55E+00	2.19E-01	-3.26E+01
Depletion potential of the stratospheric ozone layer	eq. kg CFC 11	6.97E-06	1.07E-07	3.11E-07	7.39E-06	4.93E-07	0.00E+00	0.00E+00	9.27E-10	3.58E-09	1.20E-08	3.81E-09	-2.94E-06
Acidification potential of soil and water	eq. kg SO ₂	7.19E-01	1.49E-02	1.14E-02	7.45E-01	2.13E-01	0.00E+00	0.00E+00	1.45E-04	4.98E-04	4.49E-03	9.90E-04	-1.61E-01
Eutrophication potential	eq. kg (PO ₄) ⁻³	1.36E-01	3.84E-03	7.93E-03	1.48E-01	2.99E-02	0.00E+00	0.00E+00	1.40E-04	1.28E-04	2.62E-03	2.33E-03	-1.19E-02
Formation potential of tropospheric ozone	eq. kg Ethene	4.54E-02	1.40E-03	1.09E-03	4.79E-02	1.08E-02	0.00E+00	0.00E+00	1.07E-05	4.67E-05	4.63E-04	8.84E-05	-8.63E-03
Abiotic depletion potential (ADP-elements) for non-fossil resources	eq. kg Sb	4.98E-03	1.93E-05	1.68E-05	5.02E-03	2.40E-04	0.00E+00	0.00E+00	3.16E-07	6.44E-07	6.78E-06	3.58E-07	-2.13E-05
Abiotic depletion potential (ADP-fossil fuels) for fossil resources	MJ	7.61E+02	8.38E+01	1.27E+02	9.71E+02	2.85E+02	0.00E+00	0.00E+00	5.42E-01	2.80E+00	1.29E+01	4.08E+00	-2.62E+02

Type III Environmental Product Declaration No. 553/2023

Table 20. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 outwards opening window - the resource use

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	5.57E+02	1.32E+00	3.97E+01	5.98E+02	2.05E+01	0.00E+00	0.00E+00	7.91E-01	4.41E-02	4.82E-01	5.22E-02	-4,64E+02
Consumption of renewable primary energy resources used as raw materials	MJ	2.72E+01	0.00E+00	0.00E+00	2.72E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0,00E+00
Total consumption of renewable primary energy resources	MJ	5.84E+02	1.32E+00	3.97E+01	6.25E+02	2.05E+01	0.00E+00	0.00E+00	7.91E-01	4.41E-02	4.82E-01	5.22E-02	-4,64E+02
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	7.93E+02	8.57E+01	9.88E+01	9.77E+02	3.09E+02	0.00E+00	0.00E+00	8.10E-01	2.86E+00	-6.29E+01	-1.02E+01	-2,74E+02
Consumption of non-renewable primary energy resources used as raw materials	MJ	2.46E+01	0.00E+00	4.15E+01	6.61E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.36E+01	1.43E+01	0,00E+00
Total consumption of non-renewable primary energy resources	MJ	8.17E+02	8.57E+01	1.40E+02	1.04E+03	3.09E+02	0.00E+00	0.00E+00	8.10E-01	2.86E+00	4.93E+00	4.14E+00	-2,74E+02
Consumption of secondary materials	kg	9.26E-01	3.86E-02	2.04E-02	9.85E-01	8.09E-02	0.00E+00	0.00E+00	2.51E-04	1.29E-03	7.72E-03	1.52E-03	0,00E+00
Consumption of renewable secondary fuels	MJ	4.23E-01	4.90E-04	6.85E-05	4.23E-01	1.46E-02	0.00E+00	0.00E+00	1.15E-06	1.64E-05	2.87E-04	2.60E-05	0,00E+00
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0,00E+00
Net consumption of freshwater resources	m ³	2.50E+00	1.02E-02	7.88E-02	2.59E+00	1.71E-01	0.00E+00	0.00E+00	1.50E-03	3.42E-04	2.32E-03	4.32E-03	-1,82E+00

Table 21. LCA results for 1 m² of FP Alu-glas PAF 77 outwards opening window – waste categories

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Hazardous waste neutralized	kg	2.04E+00	5.74E-02	1.77E-01	2.28E+00	3.33E-01	0.00E+00	0.00E+00	3.28E-03	1.92E-03	3.11E-02	2.74E-03	-2.46E-01
Non-hazardous waste neutralised	kg	6.25E+01	1.75E+00	9.36E+00	7.37E+01	1.73E+01	0.00E+00	0.00E+00	1.82E-01	5.84E-02	5.28E-01	7.37E-01	-1.16E+01
Radioactive waste	kg	2.39E-03	2.76E-05	2.16E-04	2.63E-03	3.50E-04	0.00E+00	0.00E+00	4.23E-06	9.24E-07	9.99E-06	7.97E-07	-1.34E-03
Components for re-use	kg	0.00E+00	0.00E+00	1.92E-04	1.92E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	1.10E-01	6.27E-04	5.27E-03	1.16E-01	4.52E-03	0.00E+00	0.00E+00	1.03E-04	2.10E-05	1.09E+01	2.26E-05	0.00E+00
Materials for energy recovery	kg	1.01E-04	5.26E-06	1.51E-06	1.08E-04	1.00E-04	0.00E+00	0.00E+00	1.56E-08	1.76E-07	6.74E-07	2.74E-07	0.00E+00
Energy exported	MJ	9.66E-01	3.19E-02	4.08E-01	1.41E+00	8.81E-01	0.00E+00	0.00E+00	8.09E-03	1.07E-03	1.71E+00	8.25E-04	0.00E+00

Type III Environmental Product Declaration No. 553/2023

Table 22. LCA for 1 m² results of 3 layer glass FP Alu-glas PAF 77 inwards opening window – environmental impacts

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Global Warming Potential	eq. kg CO ₂	8.70E+01	5.96E+00	5.99E+00	9.90E+01	2.59E+01	0.00E+00	0.00E+00	4.84E-02	2.23E-01	2.02E+00	2.30E-01	-3.78E+01
Depletion potential of the stratospheric ozone layer	eq. kg CFC 11	9.03E-06	1.07E-07	3.11E-07	9.45E-06	4.72E-07	0.00E+00	0.00E+00	9.27E-10	4.01E-09	1.56E-08	3.74E-09	-3.41E-06
Acidification potential of soil and water	eq. kg SO ₂	9.23E-01	1.49E-02	1.14E-02	9.49E-01	2.03E-01	0.00E+00	0.00E+00	1.45E-04	5.58E-04	5.71E-03	9.65E-04	-1.87E-01
Eutrophication potential	eq. kg (PO ₄) ⁻³	1.90E-01	3.84E-03	7.93E-03	2.01E-01	2.87E-02	0.00E+00	0.00E+00	1.40E-04	1.44E-04	3.26E-03	3.14E-03	-1.38E-02
Formation potential of tropospheric ozone	eq. kg Ethene	5.63E-02	1.40E-03	1.09E-03	5.88E-02	1.03E-02	0.00E+00	0.00E+00	1.07E-05	5.23E-05	5.89E-04	8.92E-05	-1.00E-02
Abiotic depletion potential (ADP-elements) for non-fossil resources	eq. kg Sb	7.64E-03	1.93E-05	1.68E-05	7.67E-03	2.30E-04	0.00E+00	0.00E+00	3.16E-07	7.21E-07	8.54E-06	3.49E-07	-2.48E-05
Abiotic depletion potential (ADP-fossil fuels) for fossil resources	MJ	8.96E+02	8.38E+01	1.27E+02	1.11E+03	2.73E+02	0.00E+00	0.00E+00	5.42E-01	3.14E+00	1.68E+01	3.98E+00	-3.04E+02

Type III Environmental Product Declaration No. 553/2023

Table 23. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 inwards opening window - the resource use

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	6.47E+02	1.32E+00	3.97E+01	6.88E+02	1.98E+01	0.00E+00	0.00E+00	7.91E-01	4.94E-02	6.31E-01	5.32E-02	-5.39E+02
Consumption of renewable primary energy resources used as raw materials	MJ	3.57E+01	0.00E+00	0.00E+00	3.57E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total consumption of renewable primary energy resources	MJ	6.82E+02	1.32E+00	3.97E+01	7.23E+02	1.98E+01	0.00E+00	0.00E+00	7.91E-01	4.94E-02	6.31E-01	5.32E-02	-5.39E+02
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	9.32E+02	8.57E+01	9.88E+01	1.12E+03	2.96E+02	0.00E+00	0.00E+00	8.10E-01	3.21E+00	-8.75E+01	-1.59E+01	-3.18E+02
Consumption of non-renewable primary energy resources used as raw materials	MJ	3.11E+01	0.00E+00	4.15E+01	7.26E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.84E+01	1.99E+01	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	9.63E+02	8.57E+01	1.40E+02	1.19E+03	2.96E+02	0.00E+00	0.00E+00	8.10E-01	3.21E+00	6.56E+00	4.04E+00	-3.18E+02
Consumption of secondary materials	kg	1.38E+00	3.86E-02	2.04E-02	1.44E+00	7.75E-02	0.00E+00	0.00E+00	2.51E-04	1.44E-03	1.02E-02	1.48E-03	0.00E+00
Consumption of renewable secondary fuels	MJ	4.22E-01	4.90E-04	6.85E-05	4.23E-01	1.40E-02	0.00E+00	0.00E+00	1.15E-06	1.84E-05	3.56E-04	2.61E-05	0.00E+00
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m ³	2.98E+00	1.02E-02	7.88E-02	3.07E+00	1.64E-01	0.00E+00	0.00E+00	1.50E-03	3.83E-04	3.07E-03	4.23E-03	-2.12E+00

Table 24. LCA results for 1 m² of 3 layer glass FP Alu-glas PAF 77 inwards opening window – waste categories

Indicator	Unit	A1	A2	A3	A1-A3	B4	B5	B6	C1	C2	C3	C4	D
Hazardous waste neutralized	kg	2.88E+00	5.74E-02	1.77E-01	3.11E+00	3.19E-01	0.00E+00	0.00E+00	3.28E-03	2.15E-03	4.05E-02	2.66E-03	-2.85E-01
Non-hazardous waste neutralised	kg	8.19E+01	1.75E+00	9.36E+00	9.30E+01	1.66E+01	0.00E+00	0.00E+00	1.82E-01	6.54E-02	6.81E-01	9.94E-01	-1.35E+01
Radioactive waste	kg	2.87E-03	2.76E-05	2.16E-04	3.11E-03	3.36E-04	0.00E+00	0.00E+00	4.23E-06	1.03E-06	1.30E-05	8.04E-07	-1.55E-03
Components for re-use	kg	0.00E+00	0.00E+00	1.92E-04	1.92E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	1.70E-01	6.27E-04	5.27E-03	1.76E-01	4.34E-03	0.00E+00	0.00E+00	1.03E-04	2.35E-05	1.35E+01	2.23E-05	0.00E+00
Materials for energy recovery	kg	9.80E-05	5.26E-06	1.51E-06	1.05E-04	9.61E-05	0.00E+00	0.00E+00	1.56E-08	1.97E-07	8.89E-07	2.64E-07	0.00E+00
Energy exported	MJ	9.82E-01	3.19E-02	4.08E-01	1.42E+00	8.44E-01	0.00E+00	0.00E+00	8.09E-03	1.19E-03	2.37E+00	8.51E-04	0.00E+00

Type III Environmental Product Declaration No. 553/2023

Verification

The process of verification of this EPD is in accordance with ISO 14025 and ISO 21930. After verification, this EPD is valid for a 5-year-period. EPD does not have to be recalculated after 5 years, if the underlying data have not changed significantly.

The basis for LCA analysis was EN 15804 + A2 and ITB PCR A
Independent verification corresponding to ISO 14025 (subclause 8.1.3) <input checked="" type="checkbox"/> external <input type="checkbox"/> internal
External verification of EPD: Halina Prejzner, PhD Eng. LCA, LCI audit and input data verification: Mateusz Kozicki, PhD Verification of LCA: Michał Piasecki, PhD, D.Sc. Eng.

Note 1: The declaration owner has the sole ownership, liability and responsibility for the information provided and contained in EPD. Declarations within the same product category but from different programs may not be comparable. Declarations of construction products may not be comparable if they do not comply with EN 15804 + A2. For further information about comparability, see EN 15804 + A2 and ISO 14025. Depending on the application, a corresponding conversion factor such as the specific weight per surface area must be taken into consideration.

Note 2: ITB is a public Research Organization and Notified Body (EC Reg. no 1488) to the European Commission and to other Member States of the European Union designated for the tasks concerning the assessment of building products' performance. ITB acts as the independent, third-party verification organization (17065/17025 certified). ITB-EPD program is recognized and registered member of The European Platform – Association of EPD program operators and ITB-EPD declarations are registered and stored in the international ECO-PORTAL.

Normative references

- ITB-PCR A, v. 1.6 General Product Category Rules for Construction Products
- ISO 14025:2006. Environmental labels and declarations – Type III environmental declarations – Principles and procedures
- ISO 21930:2017 Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services
- ISO 14044:2006 Environmental management – Life cycle assessment – Requirements and guidelines
- ISO 15686-1:2011 Buildings and constructed assets – Service life planning – Part 1: General principles and framework
- ISO 15686-8:2008 Buildings and constructed assets – Service life planning – Part 8: Reference service life and service-life estimation
- EN 15804:2012+A2:2019 Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products
- ISO 14067:2018 Greenhouse gases - Carbon footprint of products - Requirements and guidelines for quantification
- EN 15942:2012 Sustainability of construction works – Environmental product declarations – Communication format business-to-business
- EN 14351-1+A2 Windows and doors - Product standard, performance characteristics - Part 1: Windows and external pedestrian doorsets



Instytut Techniki Budowlanej

00-611 Warsaw, Filtrowa 1

Thermal Physics, Acoustics and Environment Department

02-656 Warsaw, Ksawerów 21

CERTIFICATE No 553/2023 of TYPE III ENVIRONMENTAL DECLARATION

Products:

**PAF 77 SI system - doors, outwards opening window
and inwards opening window**

Manufacturer:

FP Alu-glas A/S

Hjortevej 4 , DK-7800 Skieve, Denmark


confirms the correctness of the data included in the development of
Type III Environmental Declaration and accordance with the requirements of the standard

EN 15804+A2

**Sustainability of construction works.
Environmental product declarations.
Core rules for the product category of construction products.**


This certificate, issued on 15th December 2023 is valid for 5 years
or until amendment of mentioned Environmental Declaration

Head of the Thermal Physic, Acoustics
and Environment Department


Agnieszka Winkler-Skalna, PhD



Deputy Director
for Research and Innovation


Krzysztof Kuczyński, PhD

Warsaw, December 2023